

CONTRACT PLANS



PROJECT ID: 207346-98-27
PUTNAM COUNTY, FL (86220)

CONTRACT PLANS

FINANCIAL PROJECT ID 207346-98-27

COMPONENTS OF CONTRACT PLANS SET

PROJECT COVER SHEET
GENERAL/DISCIPLINE NOTES
SITE DEVELOPMENT PLANS
RETENTION POND PLAN
DRAINAGE PLANS
STORM WATER POLLUTION PREVENTION PLAN
LIGHTING PLANS
LANDSCAPE PLANS
STANDARD DETAILS

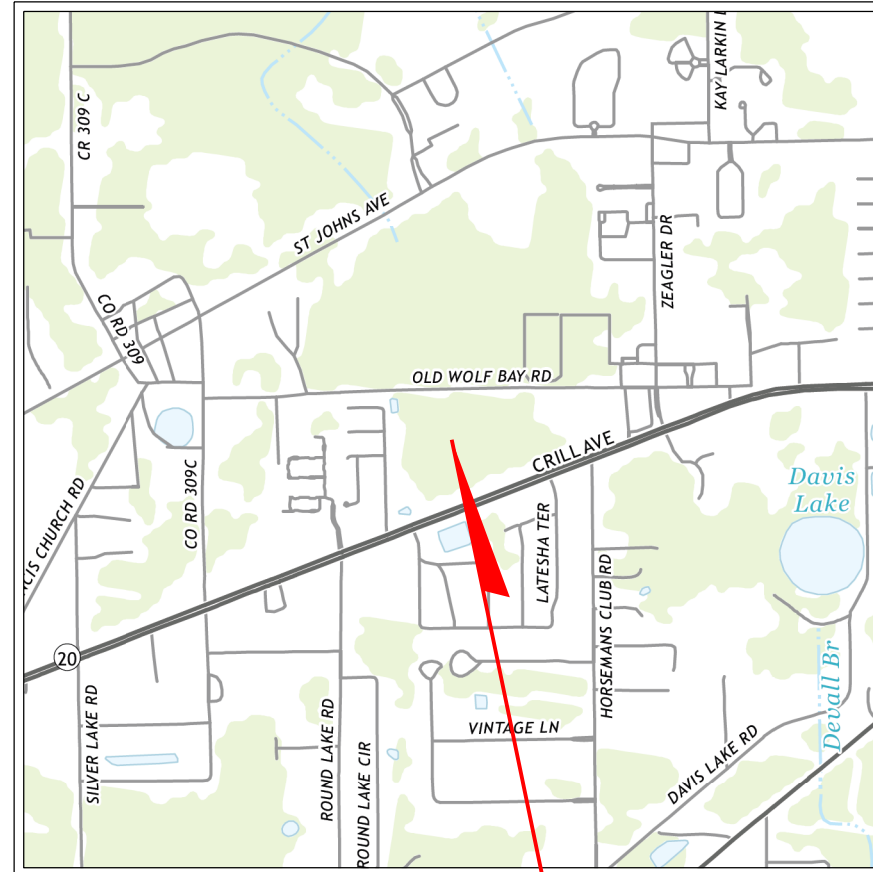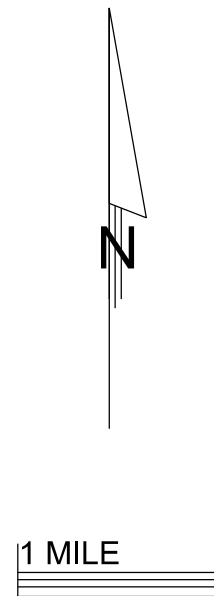

PROJECT LOCATION



SHOP DRAWINGS TO BE SUBMITTED TO:

JOHN SMITH
1109 S. MAIN AVE.
YORK, FL 12028

PLANS PREPARED BY:

MO'MEN A. SALAAM

ENGINEER OF RECORD: ROBERT J. STEVENS

P.E. NO.: 99 - 43227 - 1970

GOVERNING STANDARDS AND SPECIFICATIONS:
DESIGN STANDARDS DATED JANUARY 2012.

\$FILEL\$
\$DATE\$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



COVER SHEET

CAC Retail Center Development

COUNTY	STATE	PROJECT FINANCIAL ID
Putnam	Florida	207346-98-27

SHEET 1
OF 22

GN-01

GENERAL

1. ALL CONSTRUCTION SHALL CONFORM WITH LOCAL, COUNTY, AND STATE D.O.T. ENGINEERING STANDARDS FOR ROAD & BRIDGE CONSTRUCTION.
2. THE CONTRACTOR SHALL COMPLY WITH LOCAL STANDARDS AND SPECIFICATIONS FOR STRIPPING, CLEARING, GRADING, BACKFILLING, AND EMBANKMENT PREPARATION.
3. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO ACQUIRE THE NECESSARY RIGHT-OF-WAY (ROW) UTILIZATION PERMIT(S) AND PROVIDE FOR THE SAFETY OF LOCAL TRAFFIC DURING CONSTRUCTION.
4. THE CONTRACTOR SHALL COORDINATE ALL WORK WITHIN EXISTING ROAD ROW'S WITH THE LOCAL TRAFFIC ENGINEER.
5. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THAT ALL REQUIRED PERMITS ARE OBTAINED BEFORE BEGINNING CONSTRUCTION. COPIES OF ALL PERMITS SHALL BE PROVIDED TO LOCAL AUTHORITIES.
6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MEETING ALL INSPECTION CRITERIA AND SCHEDULES, AND FOR SIGNING SAID INSPECTIONS.
7. THE CONTRACTOR SHALL PREPARE AND SUBMIT TO THE ENGINEER A PROJECT SCHEDULE AND UPDATE SAID SCHEDULE ON A MONTHLY BASIS.
8. THE CONTRACTOR SHALL CONTROL HIS OPERATIONS AND THOSE OF HIS SUBCONTRACTORS, AND ALL SUPPLIERS TO ASSURE THE LEAST INCONVENIENCE TO THE TRAVELING PUBLIC. THE CONTRACTOR SHALL MAINTAIN FREE AND UNOBSTRUCTED MOVEMENT OF VEHICULAR TRAFFIC AND SHALL LIMIT HIS OPERATIONS FOR THE SAFETY AND CONVENIENCE OF THE TRAVELING PUBLIC. UNDER ALL CIRCUMSTANCES, SAFETY SHALL BE THE MOST IMPORTANT CONSIDERATION.
9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR MEETING ALL INSPECTION CRITERIA AND SCHEDULES, AND FOR SIGNING FOR SAID INSPECTIONS.
10. PRIOR TO COMMENCING WORK THE CONTRACTOR SHALL FURNISH, ERECT AND MAINTAIN ALL BARRICADES, WARNING SIGNS, AND MARKINGS FOR HAZARDS AND THE CONTROL OF TRAFFIC, IN REASONABLE CONFORMITY WITH THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES FOR STREET AND HIGHWAYS OR AS DIRECTED BY THE LOCAL TRAFFIC ENGINEER.
11. A CONTROL LINE WILL BE STAKED BY THE OWNER FOR THE WEST PROPERTY LINE. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO MAINTAIN THE CONTROL LINES.
12. ALL WORK AND ALL MATERIALS FURNISHED SHALL BE IN REASONABLY CLOSE CONFORMITY WITH THE LINES, GRADES, GRADING SECTIONS, CROSS SECTIONS, DIMENSIONS, MATERIAL REQUIREMENTS, AND TESTING REQUIREMENTS THAT ARE SPECIFIED IN THE CONTRACT, PLANS OR SPECIFICATIONS.
13. THE CONTRACTOR SHALL PROVIDE THE ENGINEER 24-HOUR ADVANCE NOTIFICATION FOR THE FOLLOWING CONSTRUCTION AND OBSERVATION ACTIVITIES:

• STORM DRAINAGE LAMPING

• PRE-FINAL OBSERVATION

• FINAL OBSERVATION
14. THE ENGINEER RESERVES THE RIGHT TO REQUIRE THE CONTRACTOR TO UNCOVER, RETEST AND/OR PERFORM ANY ACTION NECESSARY TO ENSURE THAT THE IMPROVEMENTS HAVE BEEN CONSTRUCTED IN ACCORDANCE WITH THE PLANS AND SPECIFICATIONS.
15. THE CONTRACTOR SHALL COMPLY WITH ALL FEDERAL, STATE AND LOCAL LAWS AND REGULATIONS CONTROLLING POLLUTION OF THE ENVIRONMENT.
16. THE CONTRACTOR SHALL FAMILIARIZE HIMSELF WITH THE POLICIES AND GUIDELINES ESTABLISHED BY LOCAL AUTHORITIES FOR THE PRESERVATION OF ALL PUBLIC AND PRIVATE PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL DAMAGE OR INJURY TO PROPERTY OF ANY CHARACTER, DURING THE EXECUTION OF THE WORK, RESULTING FROM ANY OMISSION, NEGLECT, OR MISCONDUCT IN HIS MANNER OR METHOD OF EXECUTING THE WORK, OR AT ANY TIME DUE TO DEFECTIVE WORK OR MATERIALS.

17. THE ENGINEER SHALL SUBMIT SIGNED AND SEALED AS-BUILT PLANS TO LOCAL AUTHORITIES IN ACCORDANCE WITH LOCAL AUTHORITY STANDARDS.
18. THE ENGINEER OF RECORD SHALL PROVIDE LOCAL AUTHORITIES WITH A STATEMENT INDICATING THAT ALL CONDITIONS HAVE BEEN COMPLIED WITH REGARDING THE APPROVED PLANS, DEVELOPMENT ORDER AND/OR CONDITIONS OF APPROVAL.
19. THE ENGINEER OF RECORD SHALL CONDUCT THE NECESSARY INSPECTIONS OF THE CONSTRUCTION OF THOSE FACILITIES THAT WILL BECOME THE PROPERTY OF, OR COME UNDER THE OPERATION OF LOCAL AUTHORITIES AND SHALL PROVIDE LOCAL AUTHORITIES WITH A CERTIFICATION THAT THE CONSTRUCTION IS IN SUBSTANTIAL COMPLIANCE WITH LOCAL AUTHORITIES STANDARDS. LOCAL AUTHORITIES SHALL HAVE THE OPPORTUNITY, BUT NOT THE OBLIGATION, TO CONDUCT WHATEVER ADDITIONAL INSPECTIONS IT DEEMS NECESSARY. LOCAL AUTHORITIES SHALL RECEIVE COPIES OF THE ENGINEER'S INSPECTION REPORTS, TEST RESULTS, COPIES OF THE ENGINEER'S CERTIFICATIONS OF COMPLETION TO THE LOCAL WATER MANAGEMENT DISTRICT, PLUS THE AGENCY'S ACCEPTANCE/TRANSFER TO OPERATING PERMITS FOR THE STORMWATER MANAGEMENT SYSTEM.
20. ALL ELEVATIONS SHOWN HEREON ARE BASED ON N.G.V.D. DATUM.

EARTHWORK

1. THE CONTRACTOR SHALL SUBMIT AND RECEIVE APPROVAL OF THE EROSION CONTROL PLAN PRIOR TO THE PRE-CONSTRUCTION MEETING.
2. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN A COPY OF THE GEOTECHNICAL ENGINEER'S REPORT FOR THIS PROJECT AND MEET THE GEOTECHNICAL ENGINEER'S REQUIREMENTS FOR SOIL PREPARATION ON THE SITE.
3. THE CONTRACTOR SHALL COORDINATE ALL BACKFILL OPERATIONS WITH THE RESIDENT SOILS ENGINEER.
4. THE CONTRACTOR SHALL BE REQUIRED TO KEEP A WATER TRUCK ONSITE TO CONTROL DUST DURING MASS GRADING.
5. ALL FILL MATERIAL NEEDED TO CONSTRUCT THE PROPOSED ROADWAY TYPICAL, DRAINAGE STRUCTURES, DRIVEWAYS, GUARDRAIL, PONDS, DITCH GRADING AND MAINTENANCE OF TRAFFIC SHALL BE PROVIDED BY THE CONTRACTOR FROM AREAS PROVIDED BY THE CONTRACTOR.
6. UNSUITABLE MATERIAL MAY BE ENCOUNTERED ON THE JOB. SEE CROSS SECTIONS AND SOIL SURVEY. FOR INFORMATION. UNDERCUTTING SHALL BE REQUIRED AS SHOWN IN INDEX 500.
7. ALL ARTIFACTS (ARROWHEADS, POTTERY, ETC.) FOUND ON THE SITE SHALL REMAIN THE PROPERTY OF THE OWNER AND UPON SUCH DISCOVERY, THE OWNER OR HIS REPRESENTATIVE SHALL BE NOTIFIED IMMEDIATELY.
8. ALL EXCAVATED MATERIAL NOT REUSED IN THE CONSTRUCTION SHALL BE REMOVED AND DISPOSED OF IN AN AREA PROVIDED BY THE CONTRACTOR.
9. IN AREAS WHICH REQUIRE FILL MATERIAL THE CONTRACTOR WILL STRIP OR OTHERWISE REMOVE ALL VEGETATION SUCH AS BRUSH, HEAVY SODS, HEAVY GROWTH OF GRASS, DECAYED VEGETABLE MATTER, RUBBISH AND ANY OTHER DELETERIOUS MATERIAL BEFORE EMBANKMENT IS STARTED. IMMEDIATELY PRIOR TO THE PLACEMENT OF FILL MATERIALS, THE ENTIRE AREA UPON WHICH FILL IS TO BE PLACED, SHALL BE SCARIFIED IN A DIRECTION APPROXIMATELY PARALLEL TO THE AXIS OF FILL. THE GEOTECHNICAL ENGINEER SHALL APPROVE THE AREA PRIOR TO THE PLACEMENT OF FILL.
10. CONTRACTOR IS RESPONSIBLE FOR REMOVING UNSUITABLE MATERIAL IN STORM DRAIN TRENCHES AND BACKFILLING WITH SUITABLE MATERIAL.
11. THE CONTRACTOR SHALL INSURE THAT PROPER SOIL DENSITIES ARE ACHIEVED FOR PLACEMENT OF ALL HEADWALL/ENDWALL FOOTINGS, RETAINING WALLS, AND IN GENERAL, ANY FOOTING SUPPORT DESCRIBED ON THESE PLANS. IT WILL ALSO BE THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE THAT SUFFICIENT SOILS TESTING HAS BEEN PERFORMED PRIOR TO CONSTRUCTION. ALL ORGANIC SOILS ENCOUNTERED IN BUILDING FOOTPRINT AREA ARE TO BE REMOVED AND REPLACED WITH SUITABLE FILL MATERIAL.

\$FILEL\$
\$DATES\$
\$TIMES\$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



GENERAL NOTES 01

CAC Retail Center Development			SHEET 2 OF 22
COUNTY	STATE	PROJECT FINANCIAL ID	
Putnam	Florida	207346-98-27	GN-02

EARTHWORK (CONT.)

12. COMPACT THE TOP 24 INCHES OF UTILITY TRENCHES WITHIN FUTURE ROADWAYS AREAS TO 98% OF THE MODIFIED PROCTOR DENSITY; WITHIN OTHER AREAS TO 95%.
13. MASS GRADING SHALL BE TO PLUS/MINUS 0.2 FT. AND ALL FILL SHALL BE COMPACTED TO 95% MAX. DENSITY. AASHTO T-180.
14. CONTRACTOR IS TO ASSUME ALL SOIL WITHIN PROPOSED RETENTION BASINS IS UNCLASSIFIED. SOIL SURVEY IS AVAILABLE FOR CONTRACTOR INFORMATION.
15. CROSS SECTIONS ARE PLOTTED WITH 12" LIMEROCK BASE. SEE TYPICAL SECTION FOR ALLOWED BASE OPTIONS.

DRAINAGE

1. ALL EXISTING DRAINAGE STRUCTURES ARE TO BE REMOVED UNLESS OTHERWISE STATED IN THE PLANS. ALL DRAINAGE STRUCTURES REMOVED SHALL BE DISPOSED OF BY THE CONTRACTOR IN AREAS PROVIDED BY THE CONTRACTOR.
2. STRUCTURES DESIGNATED AS MANHOLE J-1 (MOD.) IS A TYPE 1 INLET MIRRORED ABOUT CENTERLINE OF INDEX 210 TO THE BACK OF INLET.
3. CONTRACTOR SHALL BUILD ANY STRUCTURES IN PLANS DESIGNATED AS MODIFIED IN DESCRIPTION ACCORDING TO SCALED PLANS.
4. THE EXISTING WATER TABLE IS AT OR NEAR THE EXISTING GROUND SURFACE. THE CONTRACTOR IS TO BE AWARE THAT DEWATERING WILL BE EXCESSIVE AND SEVERE. CONTRACTOR IS RESPONSIBLE FOR DEWATERING AS NECESSARY TO CONSTRUCT THE PROJECT. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ANY DEWATERING PERMIT THAT MAY BE REQUIRED BY THE LOCAL WATER MANAGEMENT DISTRICT AND MEETING ALL REQUIREMENTS OF SAID PERMIT.
5. CONTRACTOR IS RESPONSIBLE FOR TRENCH PROTECTION DURING STORM DRAIN CONSTRUCTION/INSTALLATION INCLUDING BUT NOT LIMITED TO: TRENCH BOXING, SHEET PILE, SHEETING AND SHORING, UTILITY POLE SUPPORT, SIGNAL POLE SUPPORT OR ANY METHOD AS APPROVED BY THE ENGINEER IN ORDER TO PROTECT WORKERS, UTILITIES, STRUCTURES OR ADJACENT PROPERTY AND TO PREVENT CAVE-IN OF TRENCHES. OPEN TRENCHES WITHIN 10 FT. OF SIGNAL STRAIN POLES SHALL BE LIMITED TO A 1/2 DAYS OPERATION. OPEN TRENCHING WITHIN 10' OF SIGNAL STRAIN POLES DURING RAINING AND/OR WET CONDITION WILL BE PROHIBITED.
6. THE CONTRACTOR SHALL COMPLY WITH THE LATEST EDITION OF THE DESIGN STANDARDS FOR DESIGN, CONSTRUCTION, MAINTENANCE AND UTILITY OPERATIONS USING THE FOLLOWING, BUT NOT LIMITED TO, THE FOLLOWING ITEMS:

• INDEX 200 - STRUCTURE BOTTOMS TYPE J AND P

• INDEX 201 - SUPPLEMENTARY DETAILS FOR MANHOLES AND INLETS

• INDEX 210 - CURB INLET TOPS TYPE 1, 2, 3 & 4

• INDEX 231 - DITCH BOTTOM INLET TYPE B

• INDEX 232 - DITCH BOTTOM INLET TYPES D, D, E & H

• INDEX 240 - SKIMMER FOR OUTLET CONTROL STRUCTURES

• INDEX 272 - CROSS DRAIN MITERED END SECTION

• INDEX 273 - SIDE DRAIN MITERED END SECTION
7. DURING CONSTRUCTION, NO DIRECT DISCHARGE OF WATER TO DOWNSTREAM RECEIVING WATERS WILL BE ALLOWED. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING WATER QUALITY AND SHALL ROUTE DISCHARGE WATER IN SUCH A MANNER TO ADEQUATELY REMOVE SILT PRIOR TO RUNOFF FROM SITE.
8. ALL REINFORCED CONCRETE PIPE (RCP) SHALL BE MINIMUM CLASS III.
9. THE SEASONAL HIGH-WATER TABLE FOR ALL PONDS IS 100.00.
10. CONTRACTOR SHALL SUBMIT TO LOCAL AUTHORITIES A NOTICE OF INTENT (NOI), NOTICE OF TERMINATION (NOT) AND STORMWATER POLLUTION PREVENTION PLAN THAT MEETS PERMIT REQUIREMENTS.

DRIVEWAYS

1. SAW CUT ALL PAVED OR CONCRETE DRIVEWAYS AT RIGHT OF WAY OR BACK TO POINT OF HARMONIZATION IN TEMPORARY CONTRACTION EASEMENT. REPLACE WITH LIKE MATERIAL. USE 6' CONCRETE FOR CONCRETE DRIVES OR 6" LIMEROCK BASE WITH 2' ASPHALT PAVED DRIVEWAYS. TRANSITION FROM NEW DRIVEWAY WIDTH TO EXISTING DRIVEWAY WIDTH.
2. CONTRACTOR SHALL BUILD A 5" COMPACTED RECYCLED ASPHALT PAVEMENT (RAP) BASE DRIVEWAY ON ALL UNPAVED DRIVEWAYS TO RIGHT OF WAY LINE OR BACK TO POINT OF HARMONIZATION IN TEMPORARY CONSTRUCTION EASEMENTS. RAP SHALL BE SPRAYED WITH 0.2 GAL/SY OF AC-20 EMULSIFIED ASPHALT AND COVERED IN CLEAN SAND AND SEAL WITH ROLLER. MATCH WIDTH OF NEW DRIVEWAYS.
3. DRIVEWAY LOCATIONS AND DIMENSIONS ARE SHOWN IN PLANS. BUILD DRIVEWAY TYPE M 13 IN URBAN ROADWAY SECTION.

PAVEMENT

1. AREAS WITHIN THE PROJECT WHERE CURBS AND/OR TRAFFIC SEPARATORS ARE BEING REMOVED OR MODIFIED, THE CONTRACTOR SHALL USE NEW CONSTRUCTION PAVEMENT DESIGN FOR NEW PAVEMENT.
2. ALL PAVED CONNECTIONS SHALL BE CONSTRUCTED WITH NEW CONSTRUCTION PAVEMENT DESIGN.
3. ALL SWEEPING SHALL BE WITH A VACUUM TYPE STREET SWEEPER, SUPPLEMENTED BY HAND SWEEPING.
4. THE CONTRACTOR IS TO BE AWARE STATIC ROLLING IS REQUIRED WITHIN THE LIMITS OF THIS PROJECT.

UTILITIES

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING AND VERIFYING ALL EXISTING UTILITIES PRIOR TO CONSTRUCTION, AND FOR NOTIFYING THE VARIOUS UTILITY PROVIDERS TO MAKE THE NECESSARY ARRANGEMENTS FOR ANY RELOCATION, TEMPORARY DISRUPTION OF SERVICE, OR CLARIFICATION OF ACTIVITY REGARDING SAID UTILITY. THE CONTRACTOR SHALL EXERCISE EXTREME CAUTION WHEN CROSSING AN UNDERGROUND UTILITY, WHETHER SHOWN ON THESE PLANS OR FIELD LOCATED. ALL UTILITIES WHICH INTERFERE WITH THE PROPOSED CONSTRUCTION SHALL BE RELOCATED BY THE RESPECTIVE UTILITY PROVIDERS AND THE CONTRACTOR SHALL COOPERATE WITH THE UTILITY PROVIDER DURING RELOCATION OPERATIONS.
2. THE LOCATION OF ALL EXISTING UTILITIES, STORM DRAINAGE SYSTEMS AND TOPOGRAPHIC FEATURES SHOWN ON THE PLANS HAVE BEEN DETERMINED FROM THE BEST INFORMATION AND ARE PROVIDED FOR THE CONVENIENCE OF THE CONTRACTOR. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR THEIR ACCURACY. SHOULD A DISCREPANCY ARISE BETWEEN THESE PLANS AND ACTUAL FIELD CONDITIONS, WHICH WOULD APPRECIABLY AFFECT THE EXECUTION OF THESE PLANS, THE CONTRACTOR WILL HALT ALL CONSTRUCTION AND NOTIFY THE ENGINEER IMMEDIATELY.
3. UTILITIES ARE TO BE ADJUSTED BY OTHERS AS DIRECTED BY THE ENGINEER. UTILITY OWNERS INCLUDE:

UTILITY COMPANY

THE ELECTRIC CO.

FRESH WATER COOP, INC.

FLORIDA GAS COMPANY

SOUTHEAST TELCO & FIBER, INC.

CABLE TV 4 U
4. THE LOCATION OF THE UTILITIES SHOWN IN THE PLANS ARE APPROXIMATE ONLY. THE EXACT LOCATION SHALL BE DETERMINED BY THE UTILITY COMPANY DURING CONSTRUCTION. CONTRACTOR SHALL BE REQUIRED TO NOTIFY EXISTING UTILITIES AT LEAST 48 HOURS PRIOR TO BEGINNING EXCAVATION.
5. CONTRACTOR IS TO BE AWARE THAT EXISTING ABOVEGROUND AND UNDERGROUND UTILITIES ARE IN PLACE AND SHALL PROTECT SUCH UTILITIES. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY UTILITIES DAMAGED AS A RESULT OF CONSTRUCTION ACTIVITIES.

\$FILEL \$
\$DATES \$
\$TIMES \$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



GENERAL NOTES 02

CAC Retail Center Development			SHEET 3 OF 22
COUNTY	STATE	PROJECT FINANCIAL ID	
Putnam	Florida	207346-98-27	GN-03

TRAFFIC CONTROL

- 1. THE MAINTENANCE OF TRAFFIC FOR THIS PROJECT SHALL BE IN ACCORDANCE WITH THE MANUAL OF UNIFORM TRAFFIC CONTROL FOR STREETS AND HIGHWAYS (U.S. DEPARTMENT OF TRANSPORTATION F.H.W.A.). ATTENTION IS DIRECTED TO INDEX NOS. 600, 622, 623, 625, 626, 627 AND 660 OF THE ROADWAY AND TRAFFIC DESIGN STANDARDS BOOKLET DATED JANUARY 2002.
- 2. THE CONTRACTOR SHALL REMOVE OR COVER ANY SIGNAGE OR PAVEMENT MARKINGS WHICH CONFLICT WITH THE TRAFFIC CONTROL THROUGH THE WORK ZONE, WHEN THE CONFLICT NO LONGER EXISTS THE CONTRACTOR SHALL RESTORE THE SIGNS OR PAVEMENT MARKING TO THEIR ORIGINAL POSITION. REMOVAL OF EXISTING PAVEMENT MARKINGS SHALL BE ACCOMPLISHED BY MILLING, GRINDING, SAND OR HYDRO BLASTING OR BY ANY OTHER METHOD APPROVED BY THE PROJECT ENGINEER. USE OF PAINT TO COVER EXISTING PAVEMENT MARKINGS IS PROHIBITED.
- 3. CONSTRUCTION SIGNING SHALL BE INSTALLED PRIOR TO COMMENCEMENT OF CONSTRUCTION. SIGNING SHALL BE MAINTAINED DURING ALL PHASES OF CONSTRUCTION. ADVANCE WARNING SIGNS SHALL BE USED IN ACCORDANCE WITH STANDARD INDEX 600 SERIES, ROADWAY AND TRAFFIC DESIGN STANDARDS, JANUARY 2002.
- 4. THE CONTRACTOR SHALL MAINTAIN A WALKABLE PATHWAY FOR PEDESTRIANS/SCHOOL CHILDREN, DURING THE RECONSTRUCTION OF ANY EXISTING PATHWAYS/SIDEWALKS, AS PER INDEX 660. ALL COSTS ARE INCLUDED IN THE MAINTENANCE OF TRAFFIC PAY ITEM NO. 102-1.
- 5. WHENEVER CONSTRUCTION EQUIPMENT IS RELOCATED AND/OR DRIVEN ON OPEN TRAVEL LANES, THE CONTRACTOR SHALL UTILIZE INDEX NO. 627.
- 6. USE OF TRAFFIC CONTROL OFFICERS FOR TRAFFIC CONTROL REQUIRED WHEN SIGNALS ARE NOT IN USE TO MAINTAIN TRAFFIC FLOW THROUGH THE CONSTRUCTION WORK ZONE.
- 7. THE CONTRACTOR SHALL MAKE PROVISIONS FOR THE REMOVAL OF STORM WATER FROM THE ROADWAY(S) DURING CONSTRUCTION. PROVISIONS SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL PRIOR TO USE.
- 8. ANY EROSION CONTROL ITEMS NOT SHOWING IN THE PLANS, BUT NECESSARY UNDER THE CONTRACTOR’S SEQUENCE OF CONSTRUCTION SHALL BE INCLUDED IN THE RELATED PAY ITEM.
- 9. TRAFFIC CONTROL DEVICES (I.E. TEMPORARY BARRIER, BARRICADES, ETC.) SHALL BE A MINIMUM OF 2 FEET FROM TRAVEL LANE. VARIANCE FROM THIS CRITERIA SHALL REQUIRE WRITTEN APPROVAL BY THE PROJECT ENGINEER.
- 10. TRAFFIC DISRUPTIONS WHICH ARE NOT SHOWN ON THE TRAFFIC CONTROL PLAN, BUT WHICH ARE NECESSARY TO CONSTRUCT THE PROJECT, SHALL BE SUBMITTED IN WRITING TO THE ENGINEER AND APPROVAL SHALL BE OBTAINED 72 HOURS PRIOR TO THE COMMENCEMENT OF THE WORK. SUBMITTAL MATERIAL SHALL INCLUDE SKETCHES, CALCULATIONS, AND OTHER DATA REQUIRED BY THE PROJECT ENGINEER.
- 11. CONTRACTOR TO OBTAIN PERMIT FOR DRAINAGE, OVERBUILD AND RESURFACING NIGHT WORK FROM THE LOCAL PERMIT OFFICE PRIOR TO THE START OF WORK.
- 12. TEMPORARY ROAD CLOSURE FOR CURB AND GUTTER CONSTRUCTION SHALL BE MINIMIZED. ONCE THE DAILY WORK IS COMPLETED ALL EQUIPMENT AND BARRICADES SHALL BE RELOCATED TO ALLOW FOR AT LEAST A MINIMUM OF ONE TEN-FOOT LANE. LOCAL AUTHORITIES SHALL BE NOTIFIED 48 HOURS PRIOR TO ANY LANE CLOSURES. ONLY ONE LANE CLOSURE MAY OCCUR AT A TIME.
- 13. PORTABLE CHANGEABLE VARIABLE MESSAGE SIGN (VMS) SHOULD BE OPERATIONAL FOR AT LEAST 2 WEEKS PRIOR TO THE COMMENCEMENT OF WORK.
- 14. THE CONTRACTOR SHALL RESTORE ALL LANES, ELIMINATE ALL DROP-OFFS, REMOVE ALL CONSTRUCTION EQUIPMENT, AND CLEAN UP AND MAKE SAFE ALL WORK AREAS.
- 15. THE CONTRACTOR SHALL NOT MILL ANY AREA WHICH CANNOT BE RESURFACED AND TEMPORARILY STRIPED WITHIN THE SAME WORK PERIOD.
- 16. ALL THRU LANES, AS WELL AS ALL TURNING LANES, SHOULD BE MAINTAINED DURING THE CONTRACT TIME WHEN CONSTRUCTION IS NOT UNDERWAY. THE WORK FOR TEMPORARY TIMING OF THE EXISTING SIGNALIZATION CONTROLLERS IS INCLUDED IN THE MAINTENANCE OF TRAFFIC PAY ITEM NO. 102-1.
- 17. BEFORE OPENING ANY LANE TO TRAFFIC, THE CONTRACTOR SHALL REPLACE ANY OBLITERATED OR REMOVED PAVEMENT MARKINGS WITH TEMPORARY PAVEMENT MARKINGS AND REFLECTIVE PAVEMENT MARKINGS (I.E., LANE LINES, ARROWS, CROSSWALKS, STOP BARS).

SODDING

- 1. SODDING SHALL BE CENTIPEDE WITHIN CURB AND GUTTER SECTION AND BERMUDA FOR ALL OTHER AREAS.
- 2. CONTRACTOR SHALL SOD ANY EARTHED AREA WITHIN THE PROJECT LIMITS. THIS INCLUDES THE UTILITY STRIP, BACK OF SIDEWALK TO RIGHT OF WAY LINE, ANY MEDIAN, SHOULDERS DOWN SIDE STREETS, DITCHES DOWN SIDE STREETS, PONDS, AND IN TRANSITION AREAS.
- 3. CONTRACTOR SHALL WARRANTY SOD THROUGHOUT THE LIFE OF PROJECT. WATER AND FERTILIZE AS REQUIRED BY THE SPECIFICATIONS. CONTRACTOR WILL REPLACE DEAD SOD AS NECESSARY UNTIL FINAL ACCEPTANCE.
- 4. CONTRACTOR IS RESPONSIBLE FOR HAND LAYING AND PEGGING SOD IN VARIOUS AREAS. THESE AREAS INCLUDE AROUND HEADWALLS, SLOPES STEEPER THAN 1:3, OR FILL HEIGHT GREETER THAN 10'. ALL SLOPES 1:2 OR STEEPER SHALL BE PEGGED WITH 25% OVERLAP.

HAZARDOUS MATERIALS



- 1. SOIL, GROUNDWATER, AND PETROLEUM CONTAMINATION IS KNOWN TO EXIST WITHIN PROJECT LIMITS. SEE PLANS FOR SPECIFIC LOCATIONS AND INSTRUCTIONS TO ENSURE CONSTRUCTION SUPPORT OF WORKER SAFETY DURING CONSTRUCTION.
- 2. CONTAMINATION REPORT AVAILABLE FOR CONTRACTOR INFORMATION.
- 3. DIRECT INQUIRIES TO DISTRICT 2 CONSTRUCTION ENVIRONMENTAL MANAGER AT 123-456-7890.

MISCELLANEOUS

- 1. NEED A NEW PROJECT FINANCIAL ID NUMBER OR ACCREDITATION.
- 2. ANY DIRECTIONAL ARROWS, PAVEMENT MESSAGES, OR STRIPING REMOVED BY THE CONTRACTOR’S OPERATION SHALL BE REPLACED AT THE END OF EACH DAY’S OPERATION.
- 3. MOWING AND LITTER REMOVAL SHALL BE SCHEDULED EVERY FIVE WEEKS FROM APRIL 1 TO DECEMBER 1 AND 60 - 90 DAYS (AS NEEDED) FROM DECEMBER 2 TO MARCH 31 AND ONCE BEFORE PROJECT RECEIVES FINAL ACCEPTANCE.
- 4. FOR ADDITIONAL DETAILS ON RIGHT-OF-WAY SEE RIGHT-OF-WAY MAPS.
- 5. ANY FUEL STORAGE AREAS SHALL HAVE PRIOR OWNER’S APPROVAL AND APPROPRIATE MEASURES SHALL BE TAKEN TO INSURE PROTECTION OF GROUNDWATER AND SOIL RESOURCES.

\$FILEL \$
\$DATES \$
\$TIMES

REVISIONS					GENERAL NOTES 03	CAC Retail Center Development			SHEET 4 OF 22
DATE	DESCRIPTION	DATE	DESCRIPTION			COUNTY	STATE	PROJECT FINANCIAL ID	
						Putnam	Florida	207346-98-27	GN-04

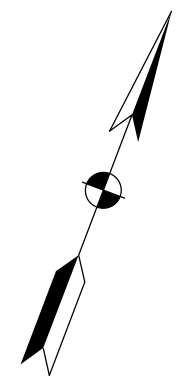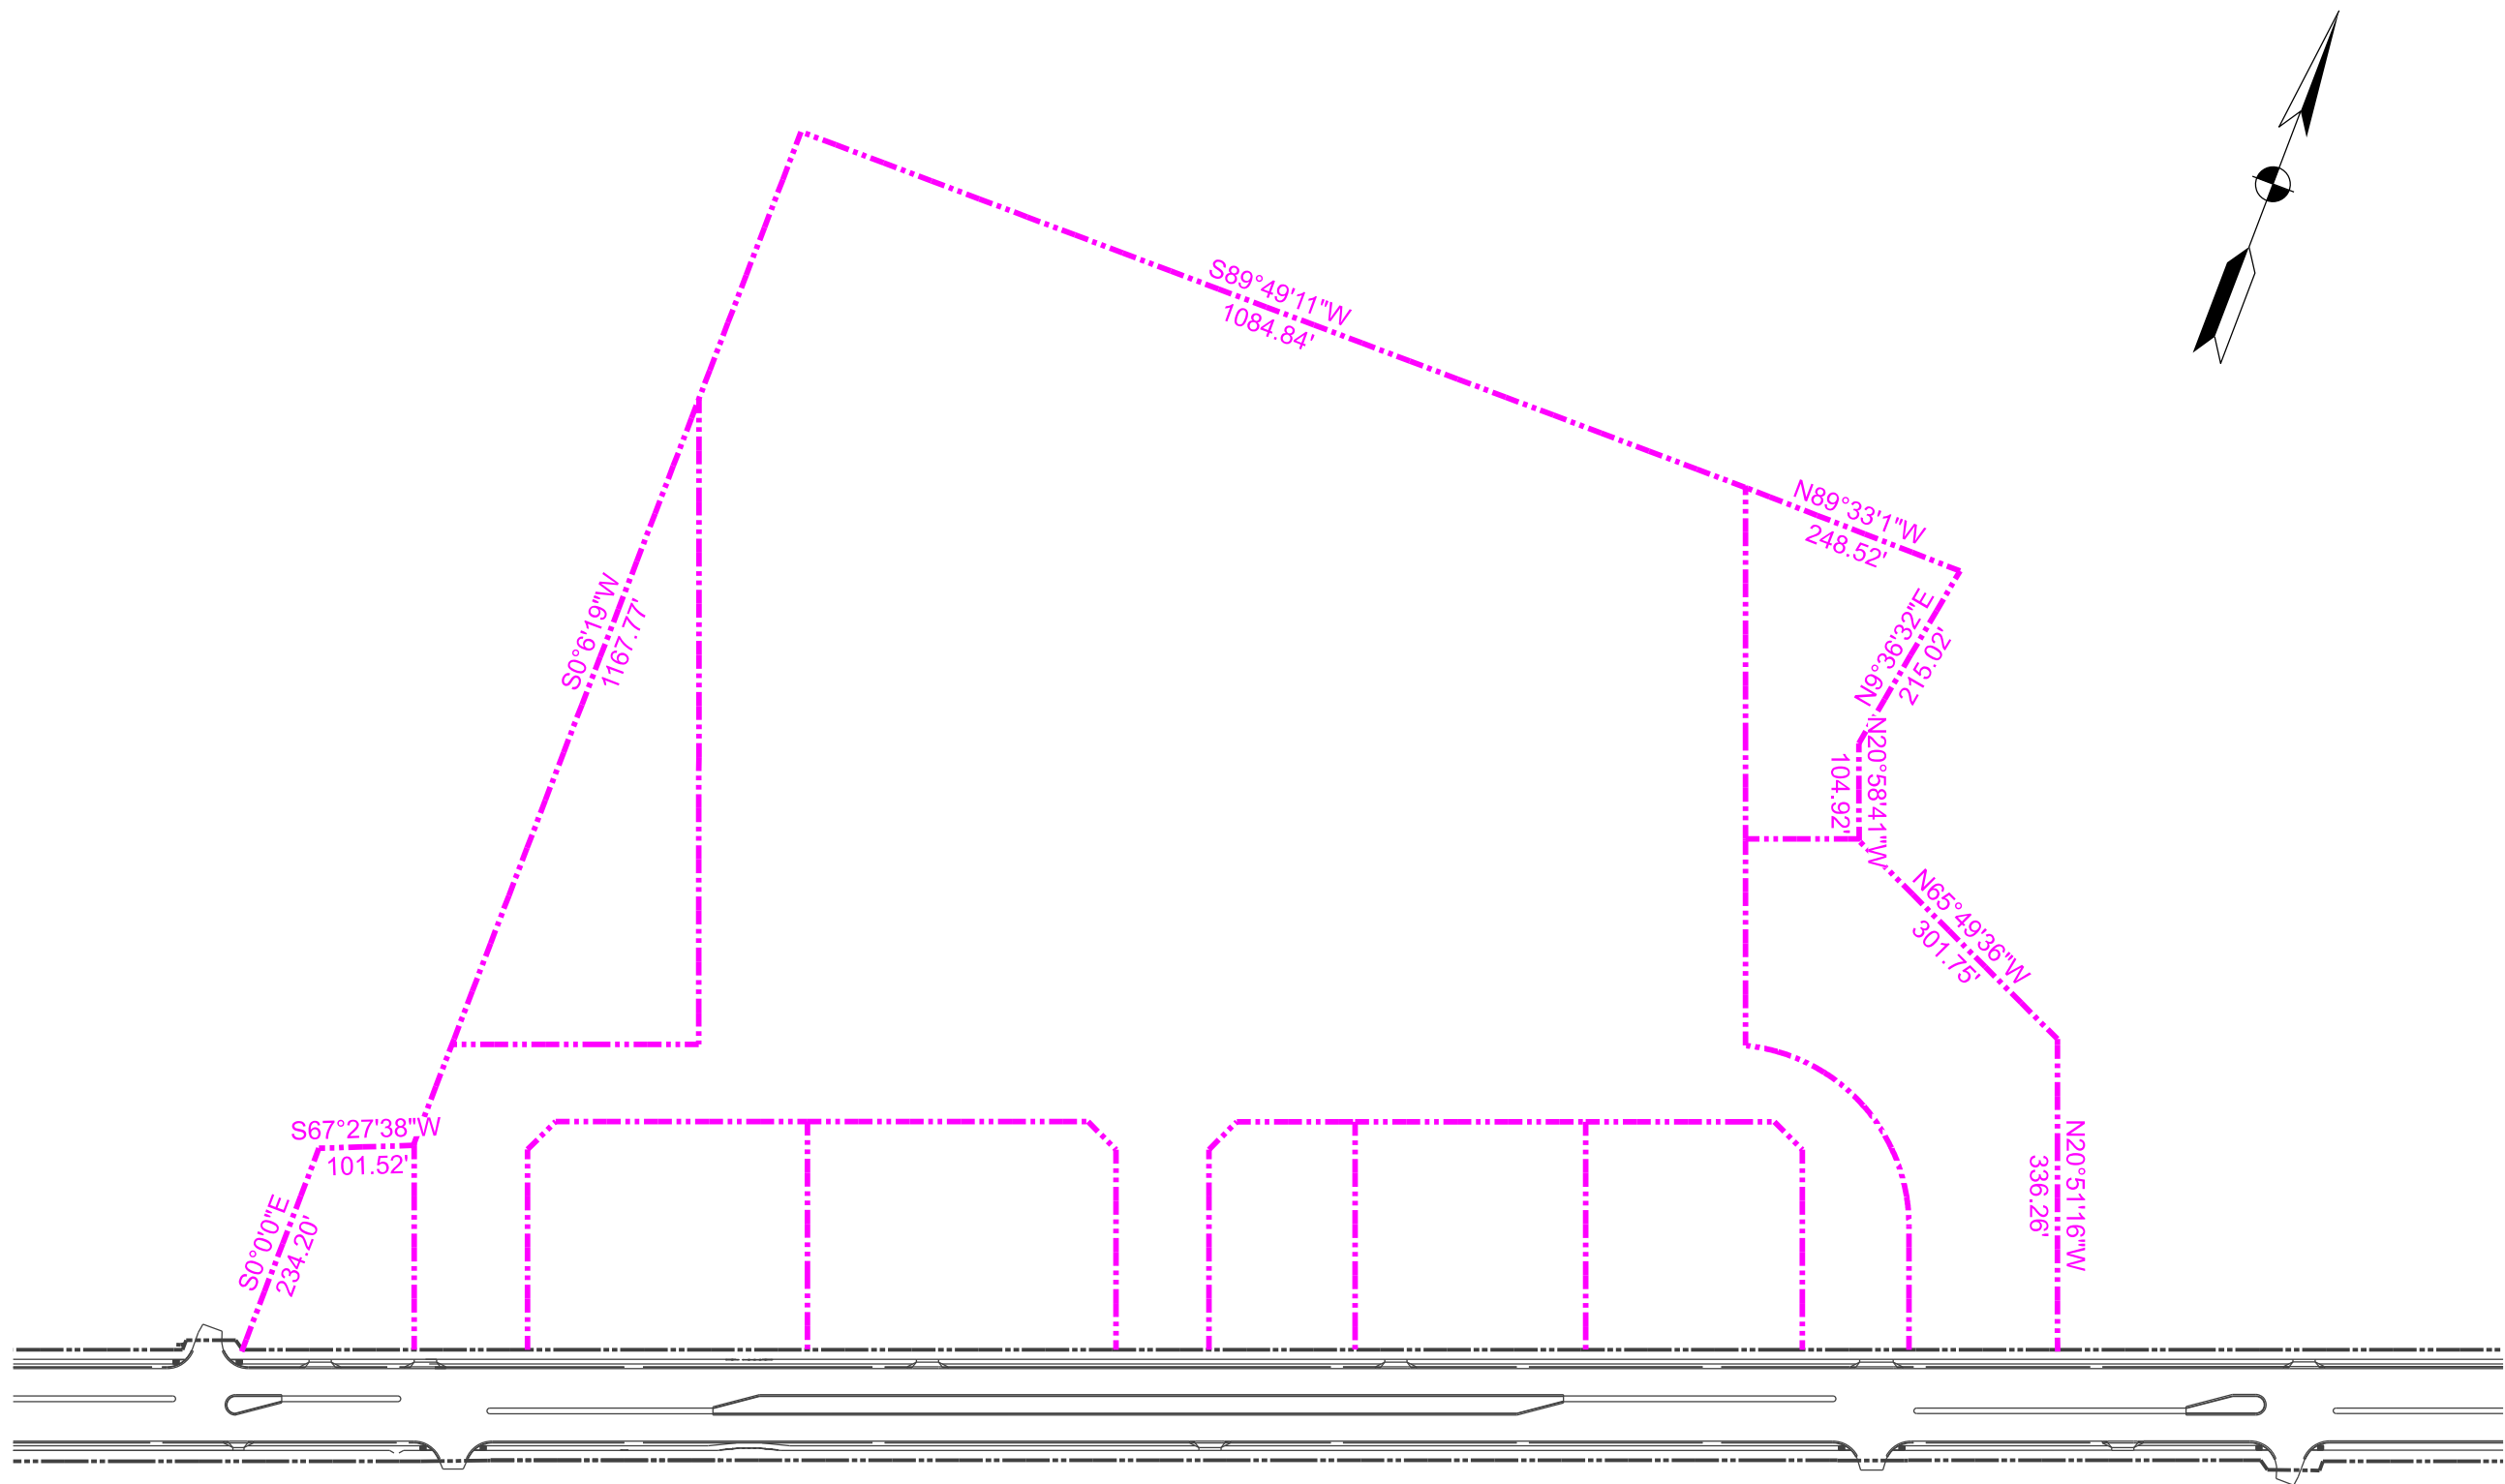



\$FILEL \$
\$DATE\$ \$TIMES

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



PROPERTY BOUNDARY PLAN

CAC Retail Development		
COUNTY	STATE	PROJECT FINANCIAL ID
Putnam	Florida	207346-98-27

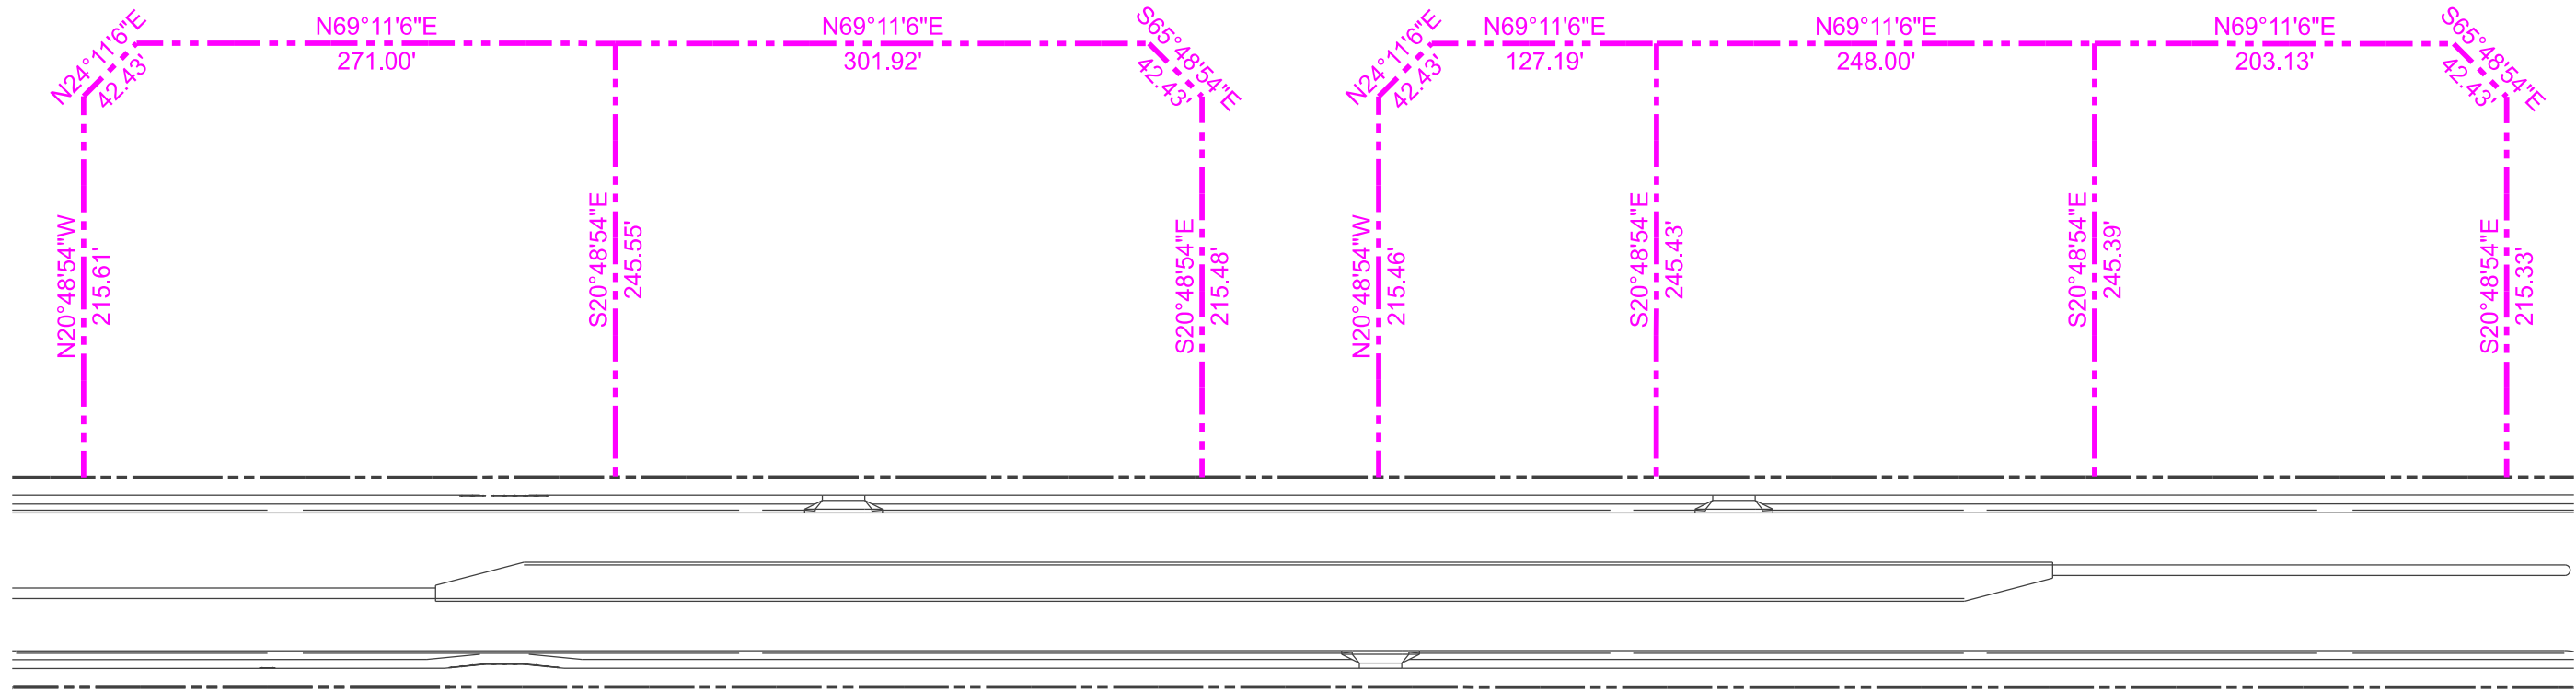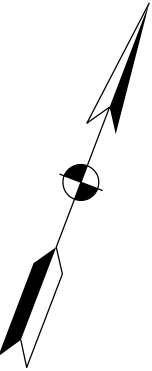

\$FILEL \$
SDATES \$
TIMES






REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



Bentley
Institute

COMMERCIAL DEVELOPMENT PARCEL PLAN

CAC Retail Development			SHEET 6 OF 22
COUNTY	STATE	PROJECT FINANCIAL ID	
Putnam	Florida	207346-98-27	PL-02

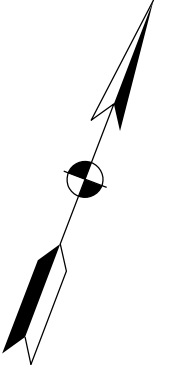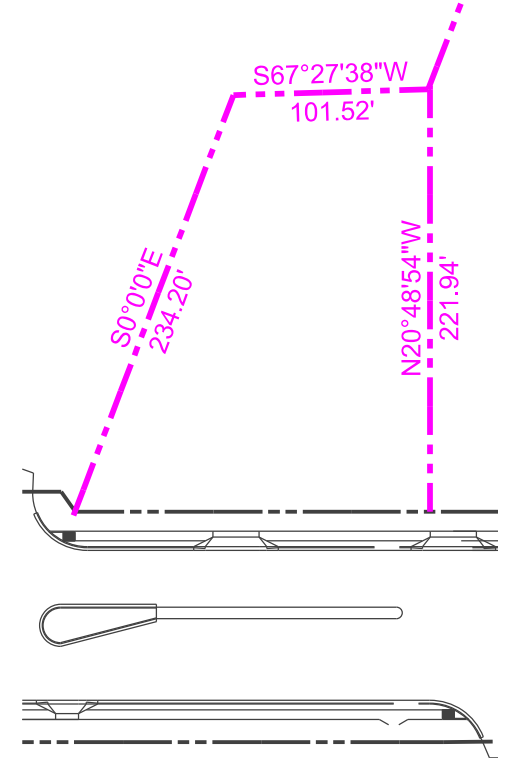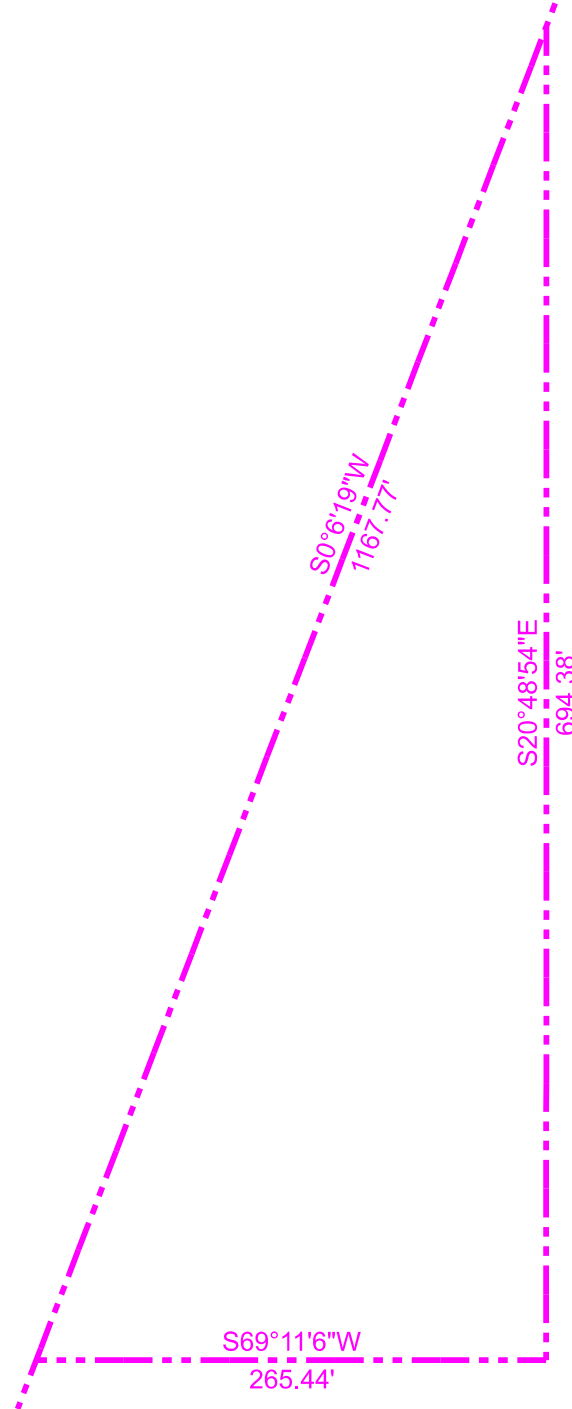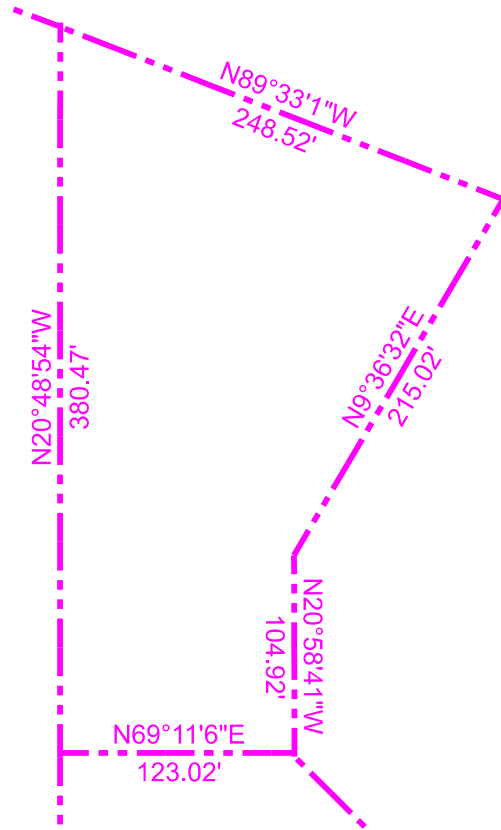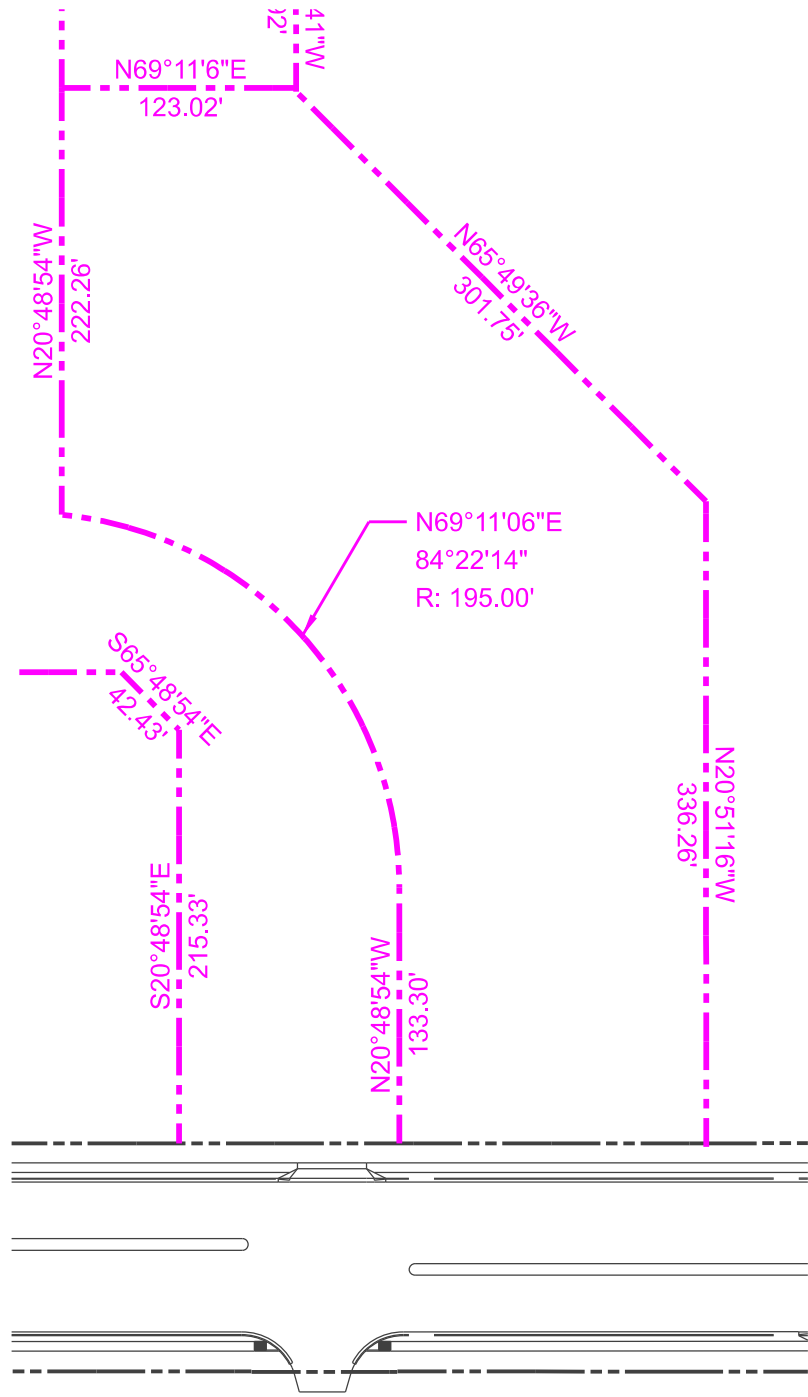



FILED \$
DATE \$
TIME \$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION





FUTURE DEVELOPMENT PARCEL PLAN

CAC Retail Development			SHEET 7 OF 22
COUNTY	STATE	PROJECT FINANCIAL ID	
Putnam	Florida	207346-98-27	PL-03

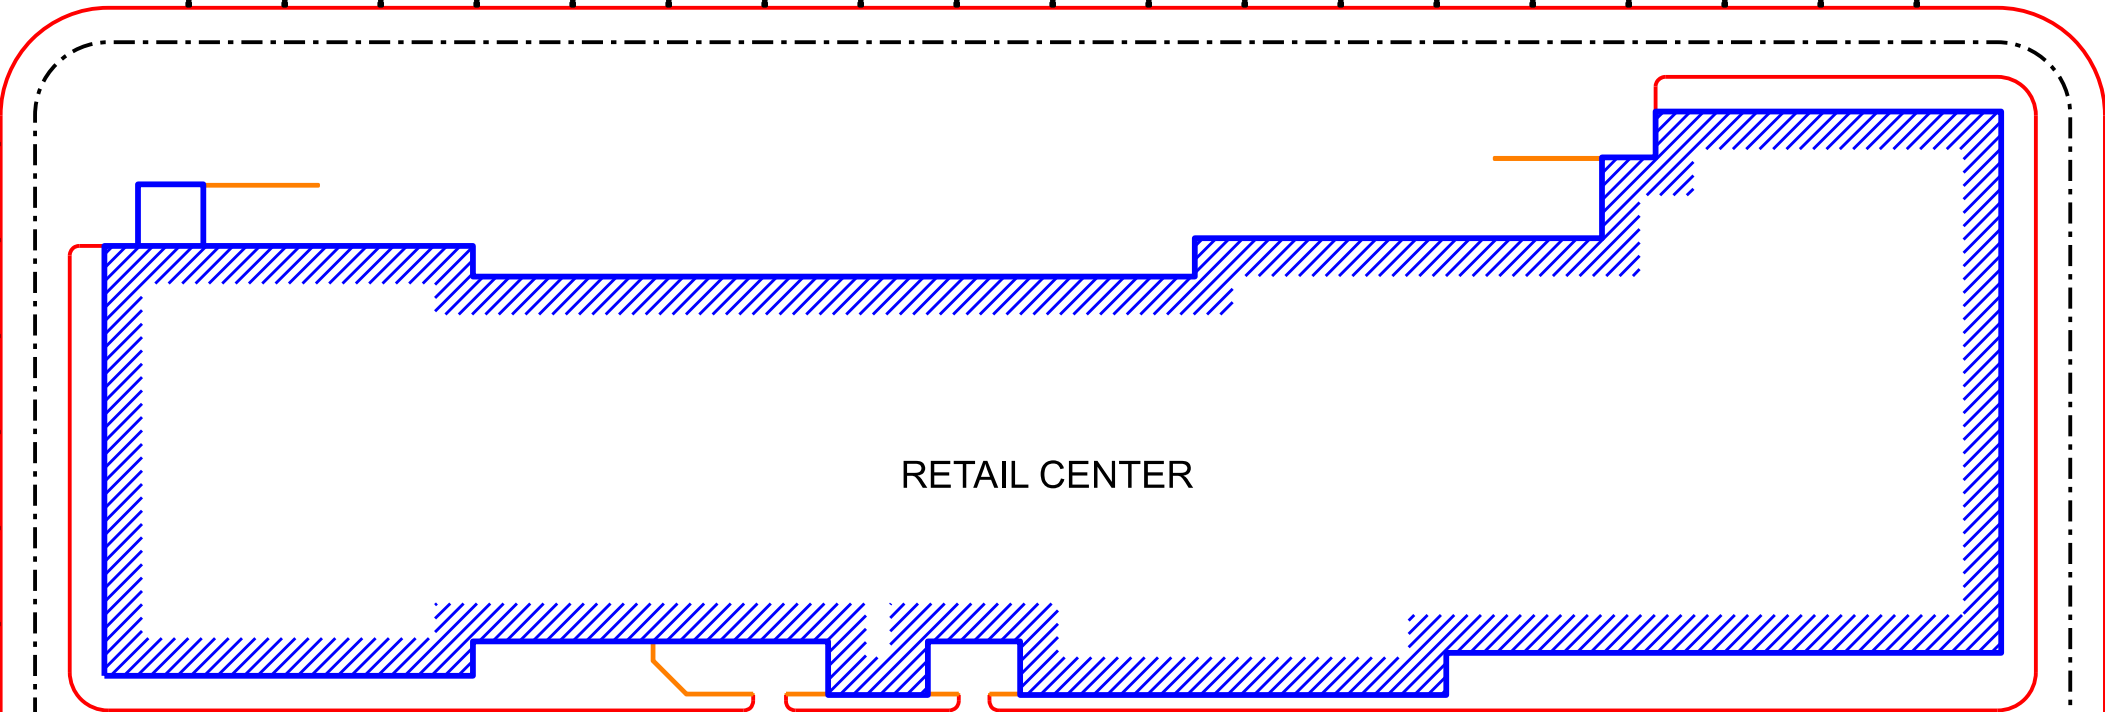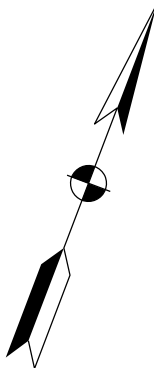

RETAIL CENTER

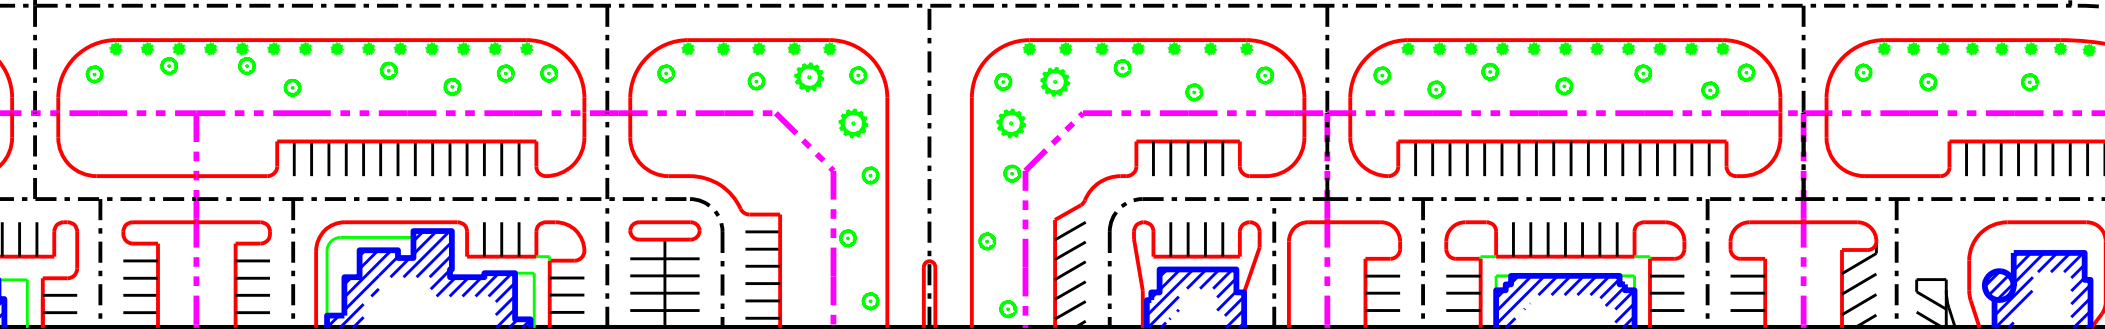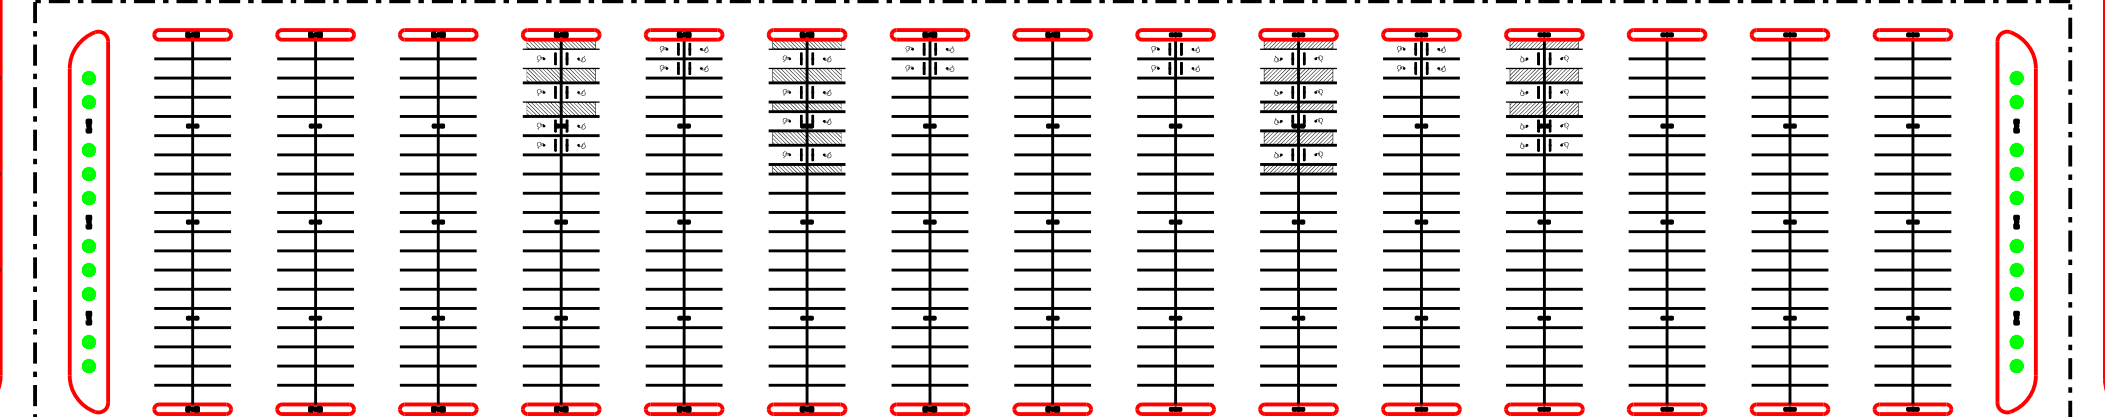

REVISIONS

DATE	DESCRIPTION	DATE	DESCRIPTION



RETAIL CENTER PLAN



CAC Retail Development

COUNTY	STATE	PROJECT FINANCIAL ID
Putnam	Florida	207346-98-27


SHEET 8
OF 22

PL-04

SCALE: 1" = 40'

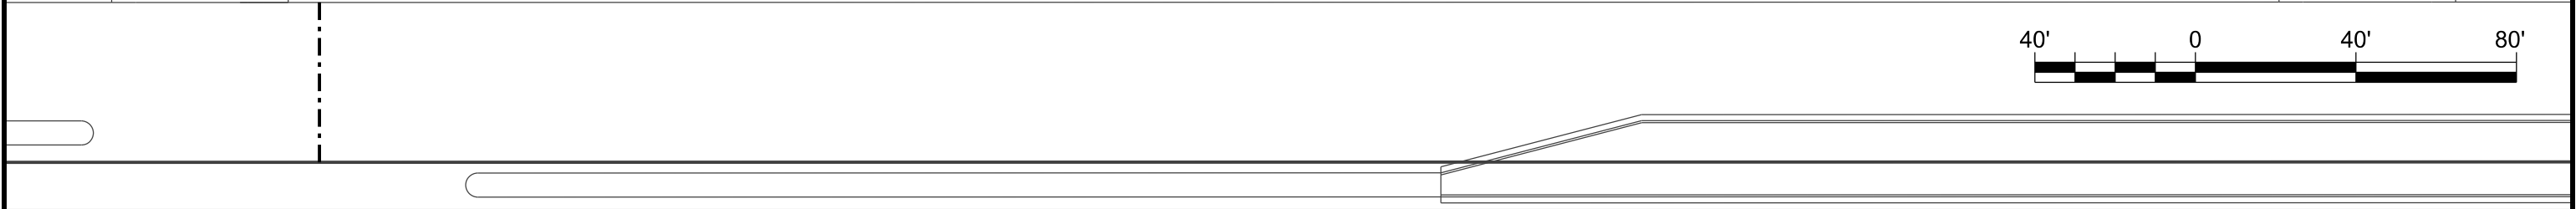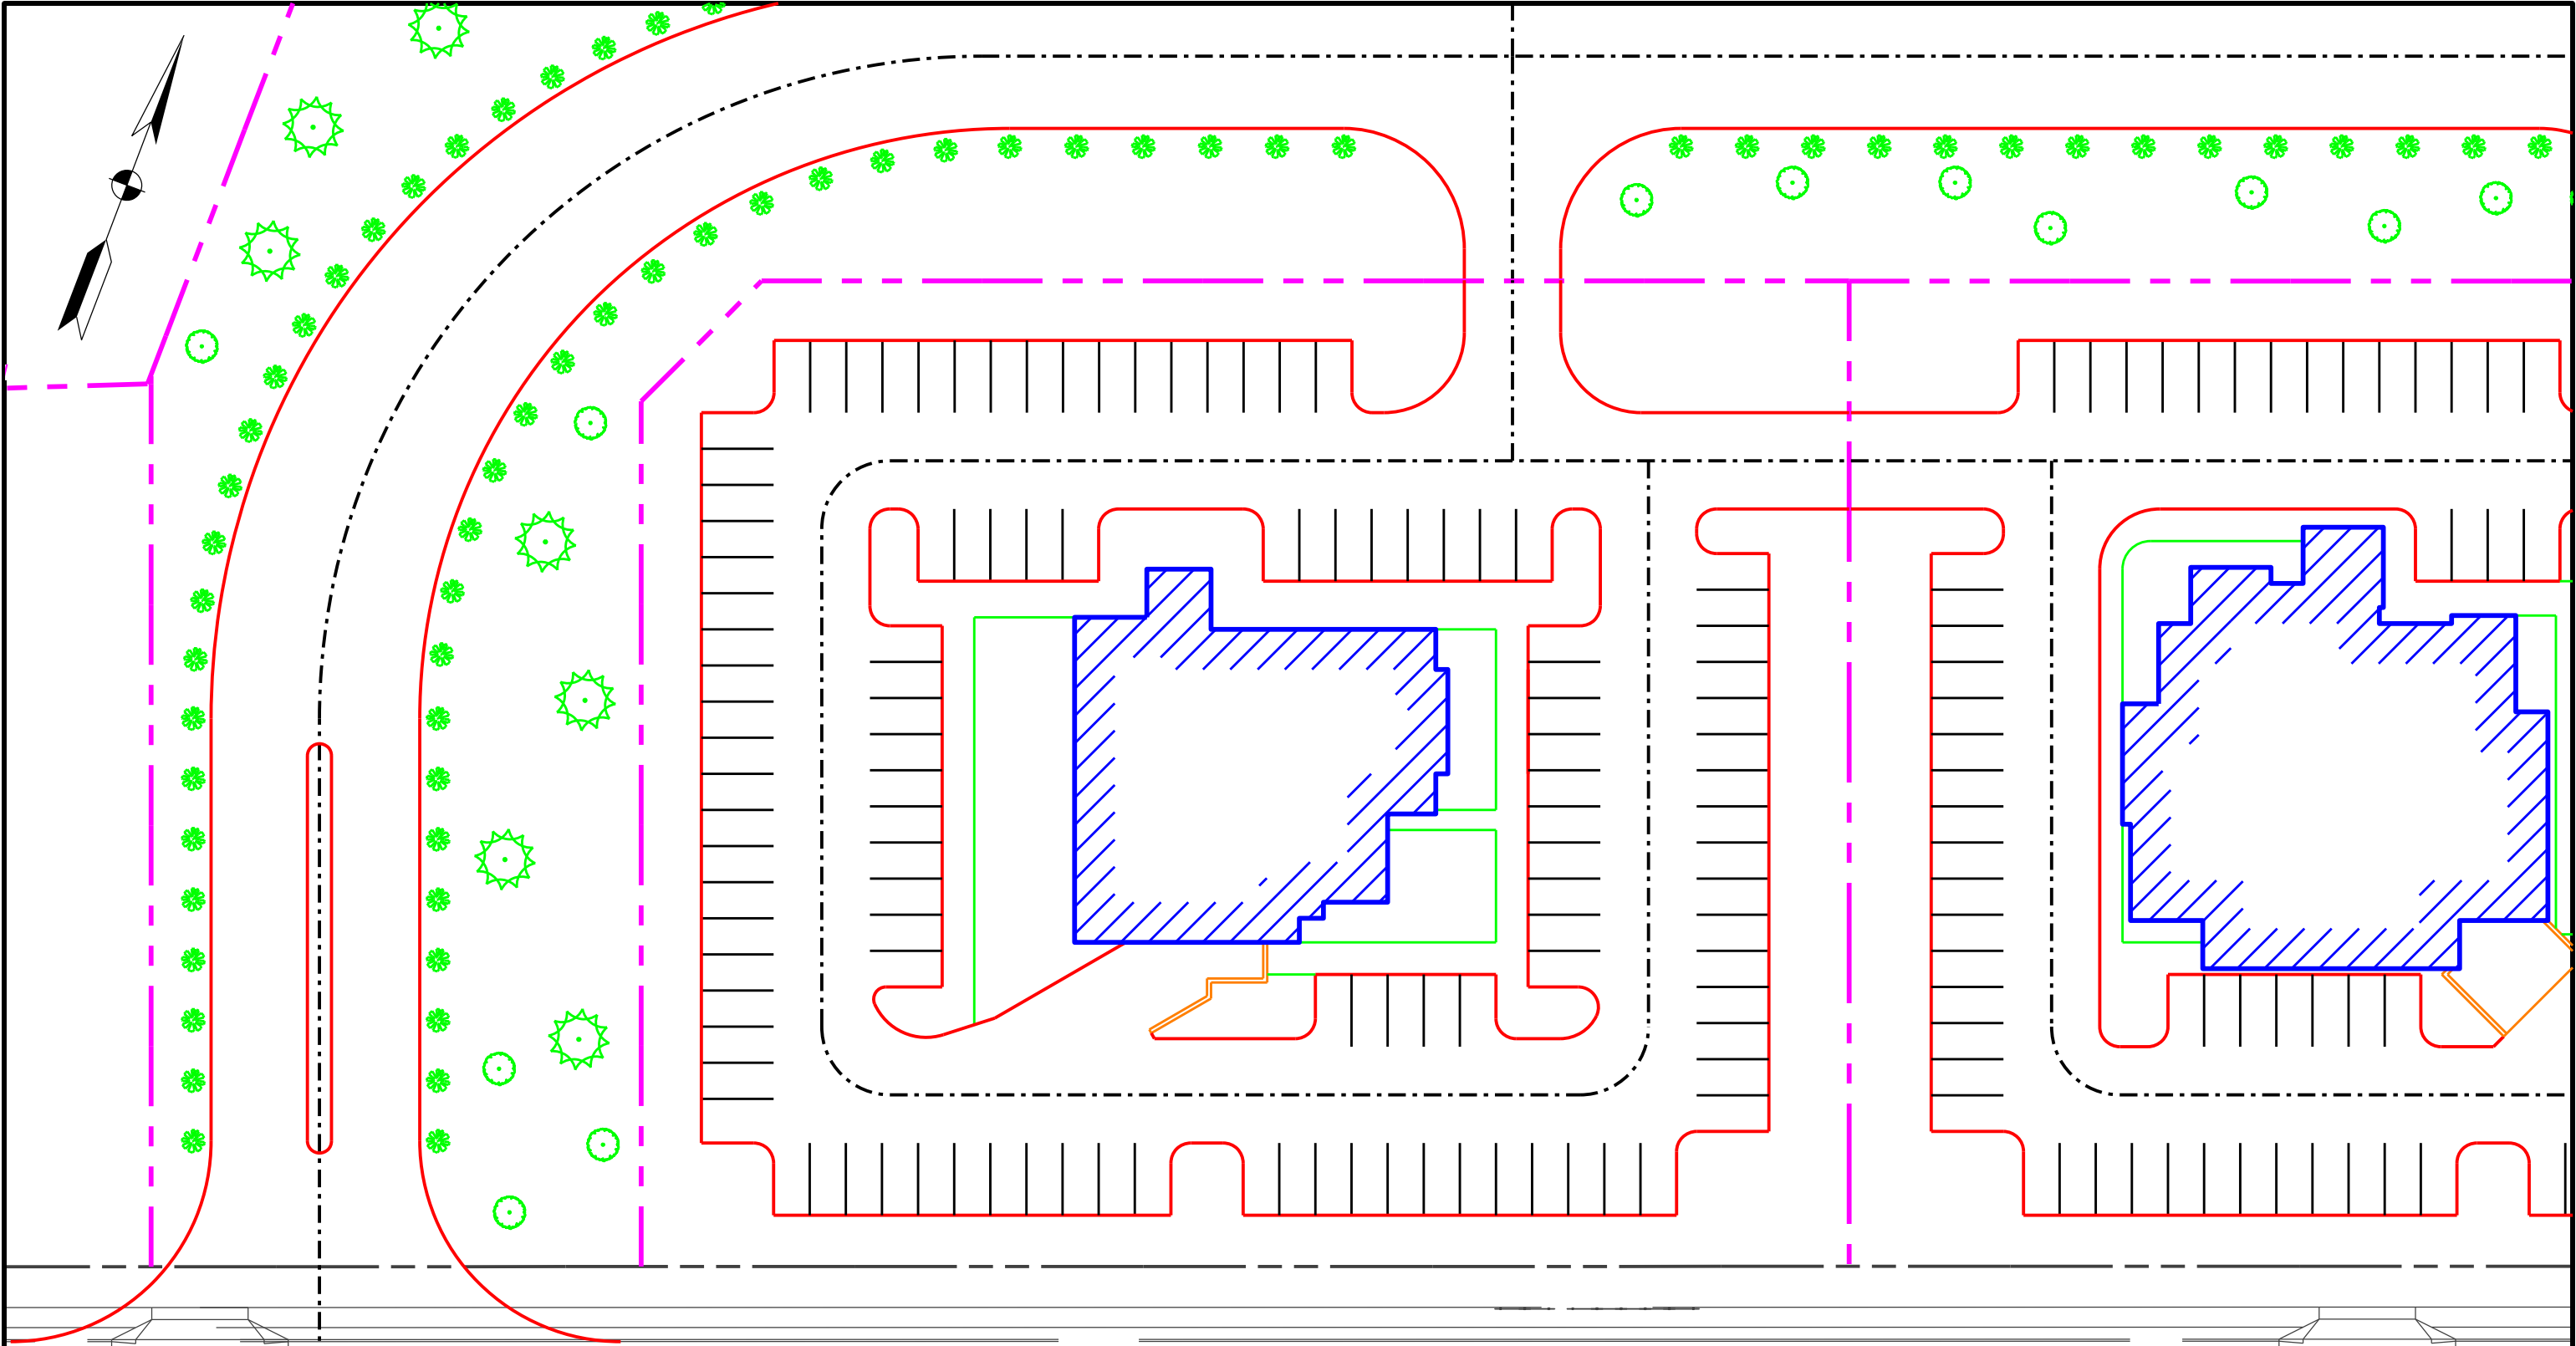

DATE		DESCRIPTION		REVISIONS			COMMERCIAL BUILDING A	CAC Retail Development			SHEET 9 OF 22
								COUNTY	STATE	PROJECT FINANCIAL ID	
								Putnam	Florida	207346-98-27	PL-05

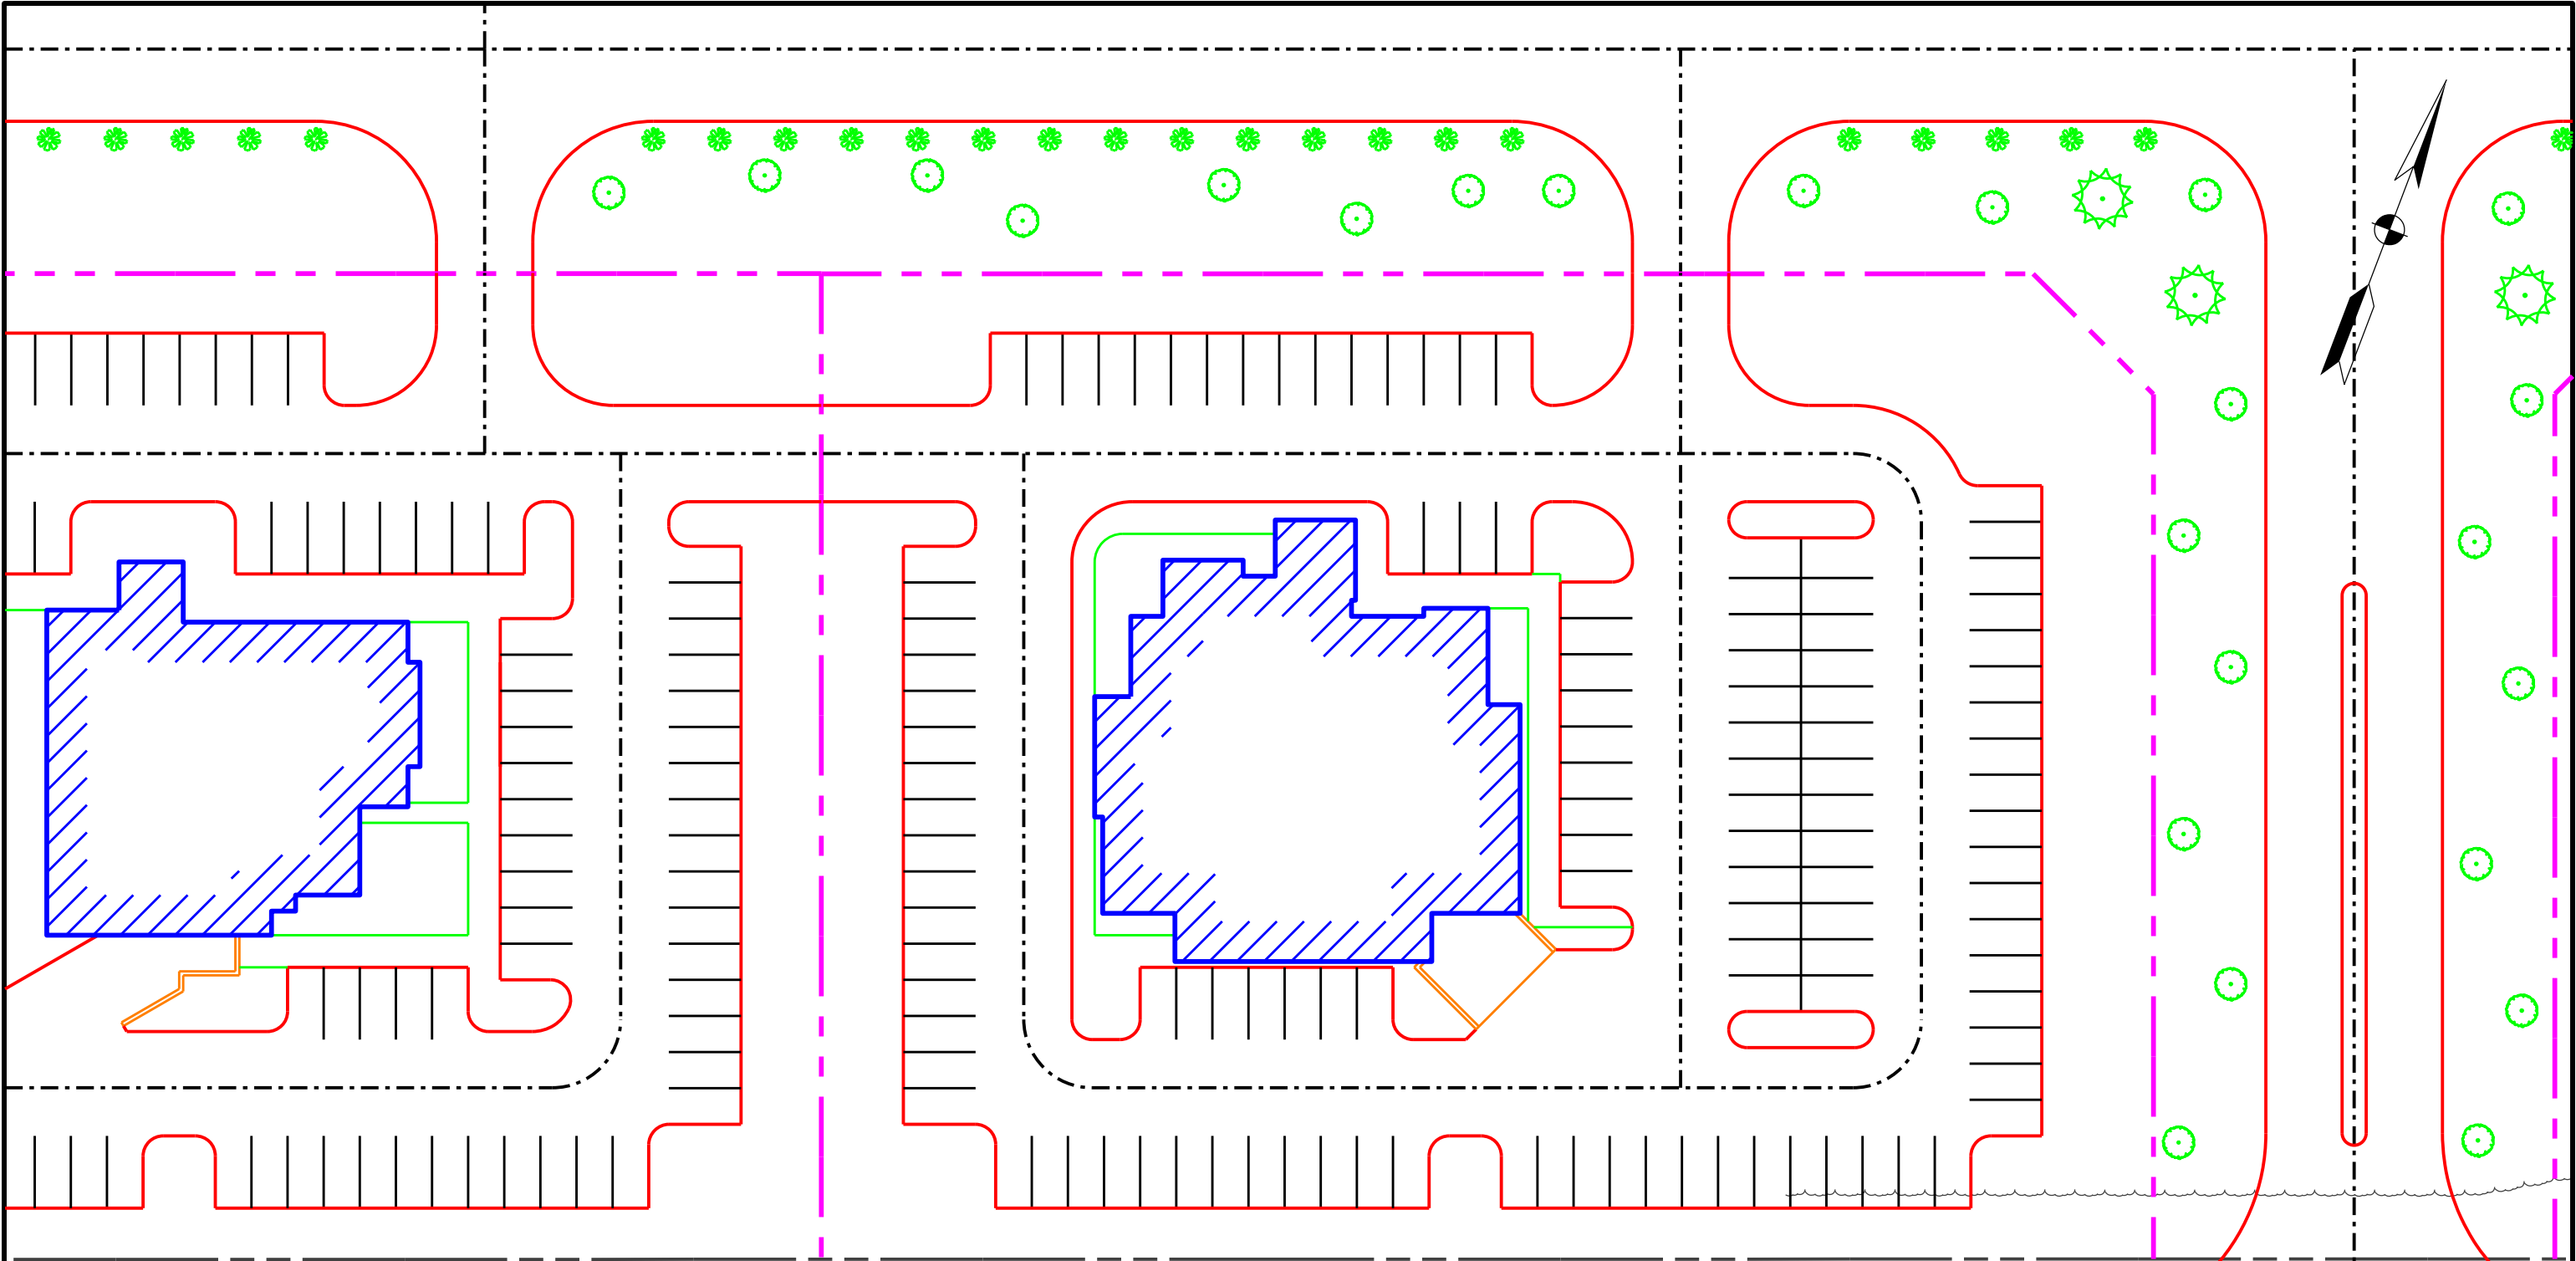

\$FILEL\$
\$DATE\$
\$TIME\$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



Bentley
Institute


COMMERCIAL BUILDING B

CAC Retail Development

COUNTY	STATE	PROJECT FINANCIAL ID
Putnam	Florida	207346-98-27

SHEET 10
OF 22

PL-06

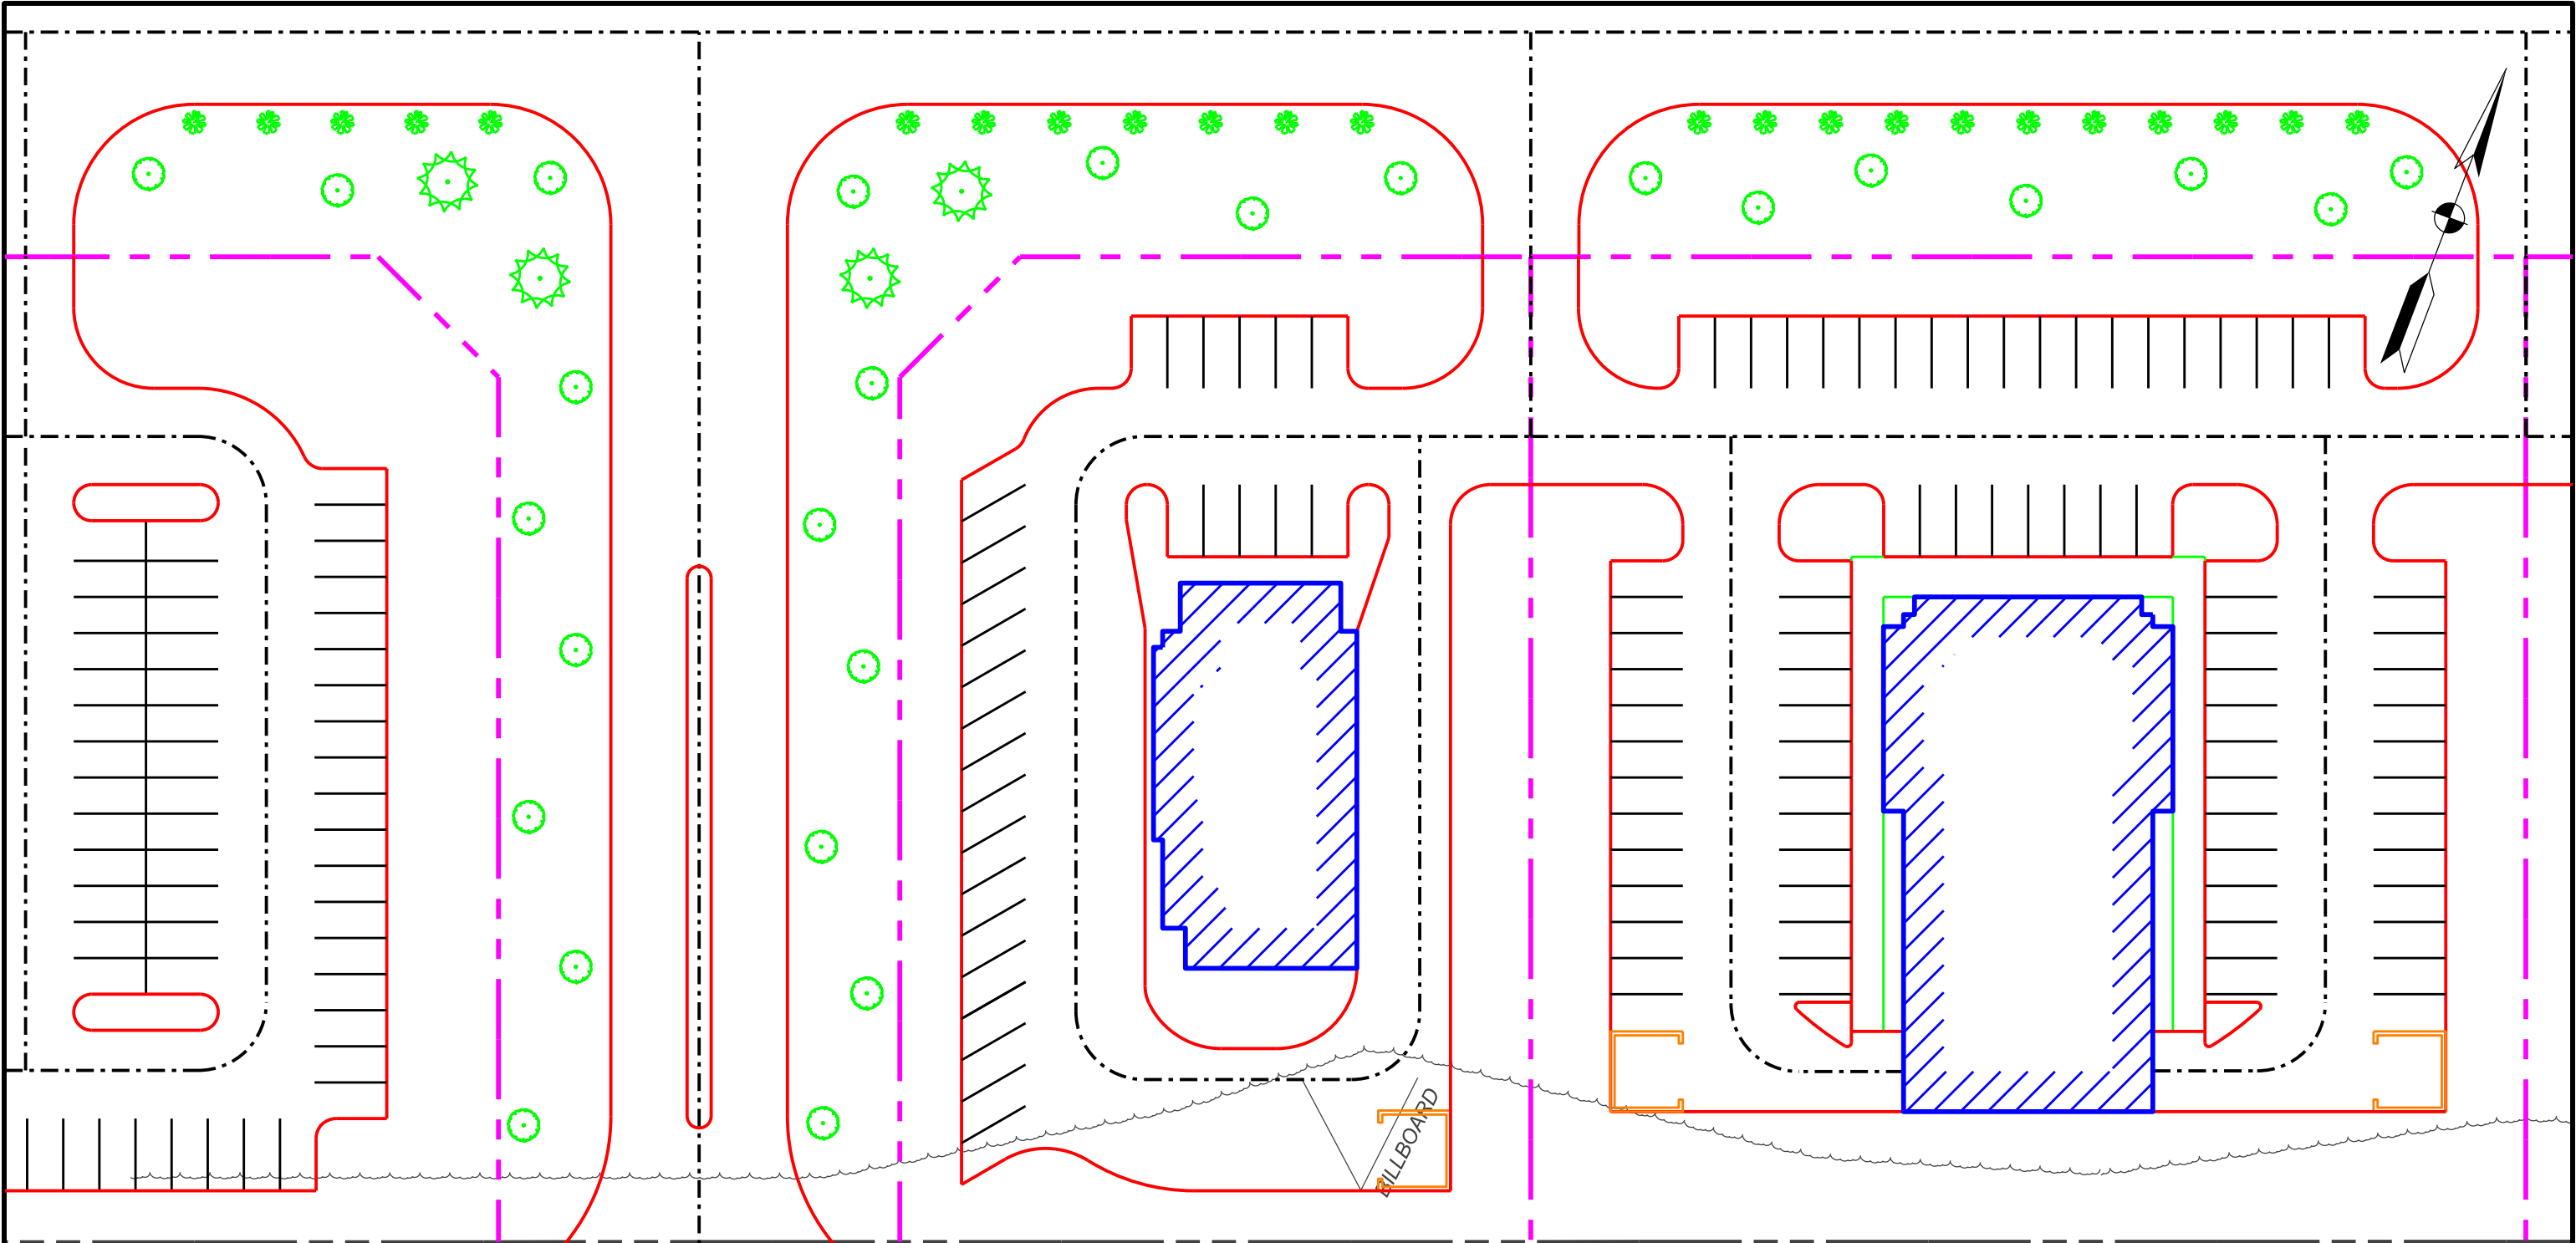

\$FILEL\$
\$DATE\$
\$TIMES\$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



Bentley
Institute

COMMERCIAL BUILDING C

CAC Retail Development

COUNTY	STATE	PROJECT FINANCIAL ID
Putnam	Florida	207346-98-27

SHEET 11
OF 22

PL-07

I. SITE DESCRIPTION

A. NATURE OF CONSTRUCTION ACTIVITY

- PROJECT LIMITS: SITE ALONG THE NORTH SIDE OF STATE ROUTE 20 (SR20)/CRILL AVE. FROM TIERRA WOOD DRIVE TO HORSEMAN CLUB ROAD.
- PROJECT DESCRIPTION: COMMERCIAL RETAIL DEVELOPMENT SITE.
- CONSTRUCTION ACTIVITIES: CONSTRUCTION OF BUILDING PADS, ACCESS ROADS, PARKING AREAS, CURB AND GUTTER, AND LANDSCAPING.
- CONSTRUCTION ACTIVITIES ALSO INCLUDE: ADDITION OF TURN LANES FROM SR20/CRILL AVE. INTO DEVELOPMENT, CONSTRUCTION OF CURB AND GUTTER, INSTALL NEW LIGHTING, UPGRADE SIGNALIZED INTERSECTIONS, UPGRADE CURB CUT RAMPS AND DRIVEWAYS, AND CONSTRUCT EXTENSION OF SIDEWALK.

B. SEQUENCE OF MAJOR SOIL DISTURBING ACTIVITIES

PHASE I: CLEAR AND GRUB, EARTHWORK ASSOCIATED WITH ACCESS ROADS, AND TURN LANE EXTENSIONS BUILDING SITES AND PARKING AREAS.

PHASE II: CONSTRUCTION OF ACCESS ROADS.

PHASE III: CONSTRUCTION OF BUILDING SITES/BUILDING PADS.

C. AREA ESTIMATES IN ACRES (AC)

- TOTAL PROJECT AREA: 37.68 AC
- TOTAL AREA TO BE DISTURBED: 34.27 AC
- EXISTING IMPERVIOUS AREA: 0.62 AC
- PROPOSED IMPERVIOUS AREA: 29.17 AC
- TOTAL PROPOSED IMPERVIOUS AREA: 29.17 + 0.62 = 29.79 AC
- EXISTING PERVIOUS AREA = TOTAL PROJECT AREA - EXISTING IMPERVIOUS AREA = 37.68 – 0.62 = 37.06 AC
- TOTAL PROPOSED PERVIOUS AREA = TOTAL PROJECT AREA - TOTAL PROPOSED IMPERVIOUS AREA = 37.68 – 29.79 = 7.89 AC

D. RUNOFF DATA

RUNOFF COEFFICIENTS FOR:

- Pervious Areas: $C = 0.20$
- Impervious Areas: $C = 0.90$
- Disturbed Areas During Construction: $C = 0.40$

WEIGHTED RUNOFF COEFFICIENTS:

- BEFORE CONSTRUCTION: CW(B)
- DURING CONSTRUCTION: CW(D)
- AFTER CONSTRUCTION: CW(A)

$$CW(B) = [(EXISTING\ PERVIOUS\ AREA * PERVIOUS\ AREA\ RUNOFF\ COEFFICIENT) + (EXISTING\ IMPERVIOUS\ AREA * IMPERVIOUS\ AREA\ COEFFICIENT)] / TOTAL\ PROJECT\ AREA$$

$$CW(B) = [(37.06 * 0.20) + (0.62 * 0.90)] / 37.68 = 0.21$$

$$CW(D) = \frac{[(\text{EXISTING Pervious AREA} * \text{DISTURBED AREA DURING CONSTRUCTION COEFFICIENT}) + (\text{EXISTING IMPERVIOUS AREA} * \text{IMPERVIOUS AREA COEFFICIENT})] / \text{TOTAL PROJECT AREA}}$$

$$CW(D) = [(37.06 * 0.40) + (0.62 * 0.90)] / 29.64 = 0.52$$

CW(D) HAS BEEN BASED ON THE WORST-CASE ASSUMPTION THAT ALL EXISTING PERVIOUS AREA IS DISTURBED AT THE SAME TIME.

$$CW(A) = [(TOTAL\ PROPOSED\ PERVIOUS\ AREA * PERVIOUS\ AREA\ COEFFICIENT) + (TOTAL\ PROPOSED\ IMPERVIOUS\ AREA * IMPERVIOUS\ AREA\ COEFFICIENT)] / TOTAL\ PROJECT\ AREA$$

$$CW(A) = [(7.89 * 0.20) + (29.79 * 0.90)] / 29.64 = 0.96$$

SOILS DATA: ACCORDING TO THE SOIL SURVEY, PRIMARY SOILS WITHIN THE PROJECT AREA INCLUDE:
FINE SANDY SOILS


E. SITE MAP

A LOCATION MAP IS SHOWN ON THIS SHEET.

1. **LOCATIONS OF PERMANENT CONTROLS:** NO PERMANENT CONTROLS.
2. **DRAINAGE PATTERNS:** THE DRAINAGE ALONG SR20/CRILL AVE. CONSISTS OF A CLOSED SYSTEM FOR MOST OF THE PROJECT AREA. RUN-OFF FROM ASPHALT PAVEMENT AND CONCRETE DRAINS INTO SWALES AND OUTFALLS

E. SITE MAP (CONT.)

3. **APPROXIMATE SLOPES:** THE SLOPES OF THE SITE CAN BE SEEN IN THE TYPICAL SECTION SHEET.
4. **AREAS THAT SHALL NOT BE DISTURBED:** ALL AREAS OUTSIDE CLEARING AND GRUBBING AS WELL AS AREAS OUTSIDE THE RIGHT OF WAY WILL NOT BE DISTURBED.
5. **LOCATIONS OF TEMPORARY CONTROLS:** EVERY INLET AND OUTFALL.
6. **AREAS OF SOIL DISTURBANCE:** THE AREAS TO BE DISTURBED ARE INDICATED ON THE PLAN SHEETS, MAJOR SOIL DISTURBANCE WILL BE ASSOCIATED WITH THE STANDARD CLEARING AND GRUBBING OPERATION. ANY AREAS WHERE PERMANENT FEATURES ARE SHOWN TO BE CONSTRUCTED ABOVE OR BELOW GROUND WILL BE DISTURBED.
7. **AREAS TO BE STABILIZED:** ALL DISTURBED AREAS WILL BE STABILIZED WITH SOD AND LANDSCAPING. WIDENING AREAS ARE STABILIZED WITH PAVEMENT AND CONCRETE CURB AND GUTTER.
8. **SURFACE WATERS:** THERE IS ONE EXISTING DETENTION POND ADJACENT TO THE SITE DEVELOPMENT.
9. **DISCHARGE POINTS TO SURFACE WATERS:** SEE ITEM I.D. FOR THE OUTFALL INFORMATION.

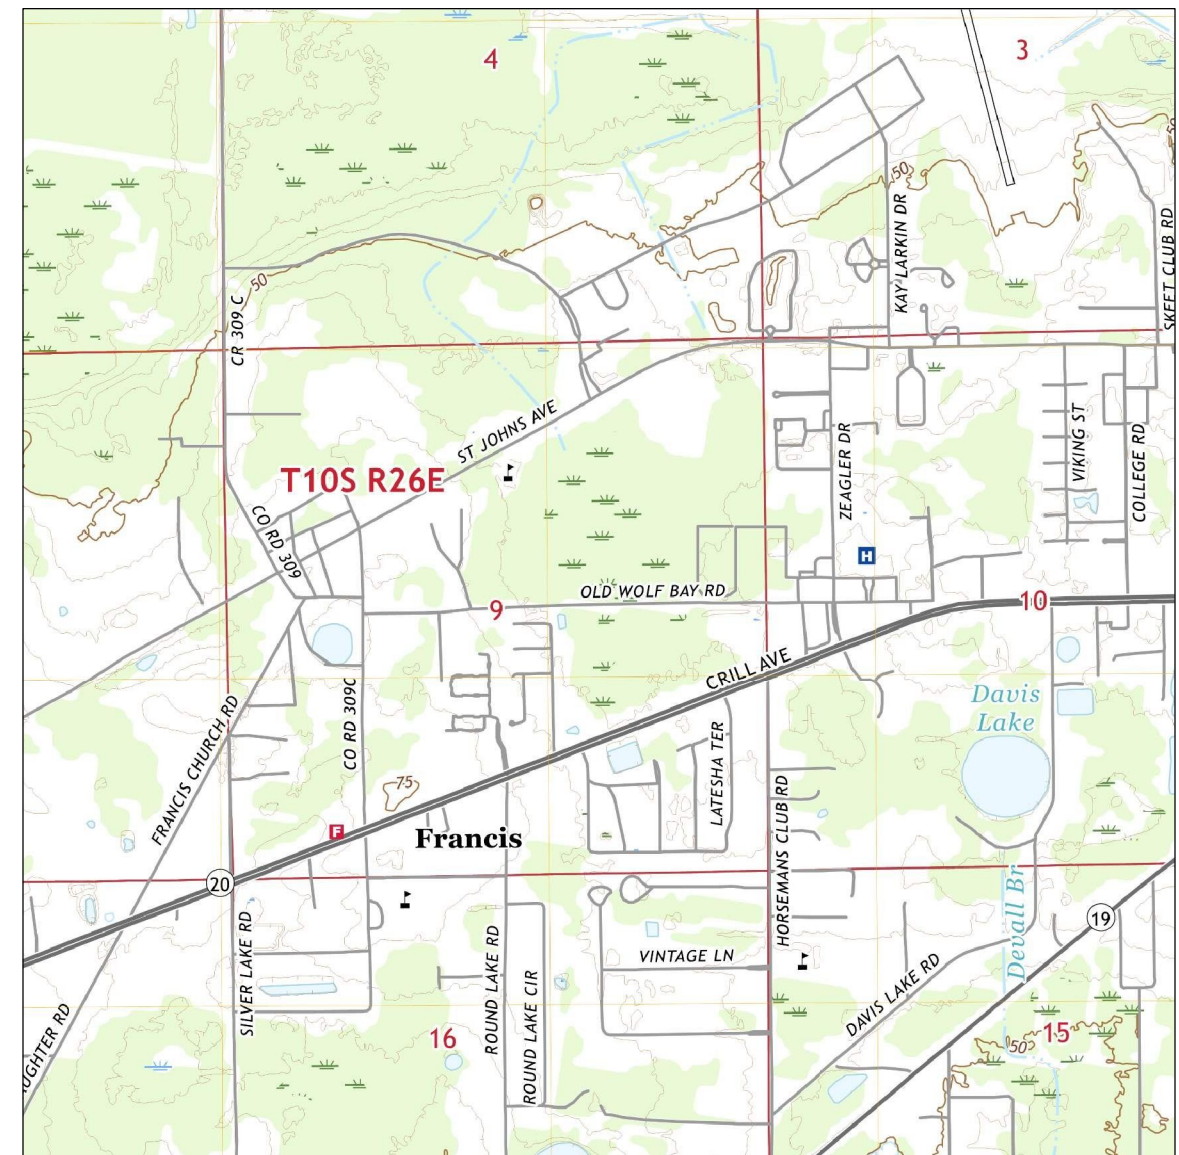

REVISIONS					STORM WATER POLLUTION PREVENTION 01	CAC Retail Center Development			SHEET 14 OF 22
DATE	DESCRIPTION	DATE	DESCRIPTION			COUNTY	STATE	PROJECT FINANCIAL ID	DR-01
						Putnam	Florida	207346-98-27	

II. CONTROLS

A. EROSION AND SEDIMENT CONTROLS

1. STABILIZATION PRACTICES

- HAY OR STRAW, BALED (PAY ITEM # 104-10-1)
- PERFORMANCE SODDING (PAY ITEM # 902-576-2)

2. STRUCTURAL PRACTICES

- SILT FENCE, STAKED (PAY ITEM # 104-13-1)
- ROCK BAGS (PAY ITEM # 104-16)

B. STORM WATER MANAGEMENT

ALL STORM WATER IN THE LIMITS OF THE PROJECT WILL BE HANDLED BY THE EXISTING SYSTEM UNTIL THE IMPROVED SYSTEM IS COMPLETED. AT THAT TIME, THE IMPROVED SYSTEM WILL HANDLE ALL THE STORM WATER IN THE LIMITS OF THE PROJECT.

C. OTHER CONTROLS

CONTRACTORS SHALL PRACTICE GOOD HOUSEKEEPING BY INSTITUTING A CLEAN, ORDERLY CONSTRUCTION SITE. THE FOLLOWING CONTROLS SHALL BE IMPLEMENTED TO FURTHER REDUCE POLLUTION AND CLUTTER AT THE PROJECT SITE.

1. DISCHARGE OF MATERIALS TO SURFACE WATERS

NO CONSTRUCTION MATERIAL SHALL BE DISCHARGED TO WATERS OF THE STATE UNLESS AUTHORIZED BY A SECTION 404 PERMIT AND / OR THE STATE OF FLORIDA ENVIRONMENTAL RESOURCE PERMIT. ALL CONSTRUCTION DEBRIS SHALL BE DISPOSED OF IN AN APPROVED UPLAND LOCATION. BUILDING MATERIAL SHALL NOT BE DISPOSED OF IN WETLANDS OR BURIED ON-SITE.

2. OFF-SITE VEHICLE TRACKING & DUST CONTROL

THE CONTRACTOR SHALL TAKE MEASURES TO INSURE THE CLEANUP OF SEDIMENTS THAT HAVE BEEN TRACKED BY VEHICLES OR HAVE BEEN TRANSPORTED BY WIND OR STORM WATER ABOUT THE SITE OR ONTO NEARBY ROADWAYS.

LOADED HAUL TRUCK SHALL BE COVERED WITH TARPAULIN. EXCESS DIRT ON THE ROAD SHALL BE REMOVED DAILY.

STABILIZED CONSTRUCTION ENTRANCES AND CONSTRUCTION ROADS, IF APPROPRIATE, SHALL BE IMPLEMENTED IN ORDER TO REDUCE OFFSITE TRACKING.

3. WASTE DISPOSAL

SANITARY / SEPTIC FACILITIES SHALL BE PROVIDED AND MAINTAINED IN A NEAT AND SANITARY CONDITION, FOR THE USE OF THE CONTRACTOR'S EMPLOYEES AS NECESSARY TO COMPLY WITH THE REQUIREMENTS AND REGULATIONS OF THE STATE AND LOCAL BOARDS OF HEALTH. A LICENSED SANITARY WASTE MANAGEMENT CONTRACTOR AS REQUIRED BY STATE REGULATIONS WILL COLLECT ALL SANITARY WASTE FROM PORTABLE UNITS.

THE CONTRACTOR SHALL DEMONSTRATE THE PROPER DISPOSAL OF ALL CONSTRUCTION WASTE GENERATED WITHIN THE PROJECT LIMITS. WASTE MAY INCLUDE, BUT NOT BE LIMITED TO, VEGETATION FROM CLEARING AND GRUBBING ACTIVITIES, PACKAGING MATERIALS, SCRAP BUILDING MATERIALS, LITTER FROM TRAVELING PUBLIC, SEWAGE FROM SANITARY FACILITIES, HERBICIDES AND PESTICIDES AND THEIR CONTAINERS AND HYDROCARBON PRODUCTS. CONTRACTOR SHALL DESIGNATE A WASTE COLLECTION AREA ON SITE AND DELINEATE THE AREA ON THE SWPPP SITE MAP.

THE CONTRACTOR WILL PROVIDE LITTER CONTROL AND COLLECTION WITHIN THE PROJECT LIMITS DURING CONSTRUCTION ACTIVITIES. CONTRACTOR WILL PROVIDE AN ADEQUATE NUMBER OF LITTER CONTAINERS WITH LIDS AT THE STAGING, STOCKPILE AND FIELD OFFICE AREAS. WASTE COLLECTION WILL BE SCHEDULED SO THAT CONTAINERS ARE EMPTIED PRIOR TO OVERFLOW. SPILLED LITTER CONTAINERS WILL BE CLEANED UP IMMEDIATELY.

4. FERTILIZERS AND PESTICIDES

HERBICIDE AND PESTICIDES SHALL BE STORED ONSITE IN THEIR ORIGINAL CONTAINERS WITH PRODUCT LABEL INTACT.

THE APPLICATION AND HANDLING OF HERBICIDES AND PESTICIDES SHALL BE IN COMPLIANCE WITH THE MANUFACTURER'S RECOMMENDED METHOD AND IN ACCORDANCE WITH STATE AND LOCAL CODES.

5. TOXIC SUBSTANCES

CONTRACTOR SHALL PROVIDE EQUIPMENT NECESSARY TO CONTAIN AND CLEAN UP SPILLS OF HAZARDOUS MATERIALS, INCLUDING PETROLEUM PRODUCTS. SPILLS SHALL BE CONTAINED AND CLEANED UP IMMEDIATELY AFTER THEY OCCUR. SPILLED MATERIALS AND EQUIPMENT USED TO CLEAN UP THE SPILL SHALL NOT COME IN CONTACT WITH SURFACE WATERS OR BE INTRODUCED INTO STORM WATER. DISPOSAL OF SURPLUS PRODUCT WILL BE DONE ACCORDING TO MANUFACTURER RECOMMENDED METHOD.

PETROLEUM PRODUCTS SHALL BE STORED IN COVERED AREAS WITH SECONDARY CONTAINMENT SURROUNDING ALL CONTAINERS.

CONTRACTOR SHALL PROVIDE A PROJECT SPECIFIC HAZARDOUS MATERIAL SPILL CONTROL PLAN IN ORDER TO ADDRESS THE HANDLING OF HYDROCARBON AND HAZARDOUS MATERIALS.

TOXIC/HAZARDOUS MATERIALS EXPOSED DURING CONSTRUCTION ACTIVITIES SHALL BE HANDLED AS PER STATE AND LOCAL CODES.

D. STATE AND LOCAL PERMITS

DRAINAGE DISTRICT -- GENERAL PERMIT

E. STOCKPILE AND STAGING AREAS

CONTRACTOR IS RESPONSIBLE FOR EROSION CONTROL FOR STOCKPILE AND STAGING AREAS THAT CONFORM TO NPDES REQUIREMENTS. ALL STOCKPILE AND STAGING AREAS MUST BE APPROVED AND COORDINATED WITH THE DISTRICT CONSTRUCTION ENVIRONMENTAL COORDINATOR, PRIOR TO BEING USED.

III. MAINTENANCE

THE CONTRACTOR WILL BE RESPONSIBLE FOR THE MAINTENANCE AND REPAIRS OF EROSION AND SEDIMENT CONTROL DEVICES AS PER SECTION 104 OF " STANDARD SPECIFICATIONS FOR FLORIDA CONSTRUCTION" DATED 2004 AND EROSION CONTROL MATERIALS AS PER SECTION 981 OF "STANDARD SPECIFICATIONS FOR FLORIDA CONSTRUCTION" DATED 2004. THE MAINTENANCE OF THESE DEVICES AND MATERIALS WILL OCCUR UNTIL THE PROJECT ENGINEER HAS DEEMED AN AREA PERMANENTLY STABILIZED. IT WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO REMOVE ALL TEMPORARY EROSION AND SEDIMENT CONTROL DEVICES ONCE THEY HAVE SERVED THEIR PURPOSE. THE CONTRACTOR SHALL INSTALL AND MAINTAIN RAIN GAUGES ON THE PROJECT SITE, TO BE INCLUDED IN THE COST OF MOBILIZATION (PAY ITEM NUMBER: 101-1).

ALL DEVICES AND MATERIALS WILL BE MAINTAINED IN GOOD WORKING ORDER AND CONDITION. IF A REPAIR IS NECESSARY, IT WILL BE INITIATED WITHIN 24 HOURS OF REPORT. MAINTENANCE AND REPAIR REQUIRED FOR THE DEVICES AND MATERIALS SHALL BE INCLUDED IN THE COST OF THE FOLLOWING PAY ITEM NUMBERS:

- **104-10-1:** HAY OR STRAW, BALED
- **104-13-1:** SILT FENCE, STAKED
- **902-576-2:** PERFORMANCE SODDING

THE FOLLOWING WILL BE USED TO MAINTAIN EROSION AND SEDIMENT CONTROL DEVICES AND MATERIALS: HAY (OR STRAW) BALES WILL BE INSPECTED FOR BUILT-UP SEDIMENT, WASHOUTS, AND DETERIORATION. REPLACE THE BALES WHEN EITHER SEDIMENT REACHES ONE-THIRD THE HEIGHT OF THE BALES, THE BALES WASHOUT, OR THE BALES DETERIORATE SO THAT THEY ARE NO LONGER FUNCTIONING AS A BARRIER. BALES WILL BE IN PLACE NO LONGER THAN THREE MONTHS. REPAIRS MADE WILL BE INCLUDED IN THE COST OF HAY OR STRAW, BALED (PAY ITEM NUMBER: 104-10-1).

STAKED SILT FENCES WILL BE INSPECTED FOR BUILT-UP SEDIMENT, WASHOUTS, AND DETERIORATION. REPLACE THE STAKED SILT FENCE WHEN EITHER SEDIMENT REACHES ONE-THIRD THE HEIGHT OF THE STAKED SILT FENCE, IT WASHES OUT, OR BECOMES SO DETERIORATED THAT IT IS NO LONGER FUNCTIONING AS A BARRIER. STAKED SILT FENCES WILL BE IN PLACE NO LONGER THAN ONE YEAR. REPAIRS MADE WILL BE INCLUDED IN THE COST OF STAKED SILT FENCE (PAY ITEM NUMBER: 104-13-1).

SODDING WILL BE INSPECTED FOR BARE SPOTS, WASHOUTS, AND HEALTHY GROWTH.

REPAIRS WILL BE MADE FOR BARE SPOTS AND WASHOUTS TO BE INCLUDED IN THE COST OF SODDING (PAY ITEM NUMBER: 902-576-2).

\$FILEL \$
\$DATES \$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



STORM WATER POLLUTION PREVENTION 02

CAC Retail Center Development			SHEET 15 OF 22
COUNTY	STATE	PROJECT FINANCIAL ID	
Putnam	Florida	207346-98-27	DR-02

IV. INSPECTION

THE CONTRACTOR SHALL BE REQUIRED TO CONDUCT DAILY VISUAL INSPECTIONS OF ALL TEMPORARY AND PERMANENT STABILIZATION MEASURES ALONG THE PROJECT CORRIDOR. THE CONTRACTOR IS EXPECTED TO REPAIR AND / OR REPLACE THESE ITEMS AS NECESSARY. THE STORM WATER POLLUTION PREVENTION PLAN CONSTRUCTION INSPECTION REPORT (FORM # 650-040-03) SHALL BE USED TO PROVIDE WRITTEN DOCUMENTATION OF INSPECTIONS THAT ARE TO BE CONDUCTED. THIS REPORT WILL BE USED TO REPORT ANY DEFICIENCIES TO THE PROJECT ENGINEER AND THE CONTRACTOR AS PER THE BELOW REFERENCED SCHEDULE. IF CORRECTIVE ACTION IS NECESSARY, IT SHALL BE RECORDED ON THE INSPECTION REPORT. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO MAKE THE CORRECTIONS TO THE DEFICIENCIES OF THE INSPECTION REPORT IN A TIMELY MANNER.

THE CONTRACTOR SHALL APPOINT A CERTIFIED INSPECTOR TO RECORD RAINFALL, REVIEW THE PROJECT'S TEMPORARY AND PERMANENT STABILIZATION MEASURES EVERY SEVEN (7) CALENDAR DAYS, AND / OR WITHIN 24 HOURS OF THE END OF A STORM THAT DEPOSITS 0.25 INCHES OR MORE OF RAIN INTO ANY OF THE FOLLOWING:

- POINTS OF DISCHARGE TO WATERS OF THE UNITED STATES
- POINTS OF DISCHARGE TO MUNICIPAL SEPARATE STORM SEWER SYSTEMS
- DISTURBED AREAS OF THE SITE THAT HAVE NOT BEEN FINALLY STABILIZED
- AREAS USED FOR STORAGE OF MATERIALS THAT ARE EXPOSED TO PRECIPITATION
- STORM WATER MANAGEMENT SYSTEMS
- STRUCTURAL CONTROLS
- LOCATIONS WHERE VEHICLES ENTER OR EXIT THE SITE

THE CONTRACTOR SHALL INITIATE REPAIRS WITHIN 24 HOURS OF INSPECTIONS THAT INDICATE ITEMS ARE NOT IN GOOD WORKING ORDER.

WHERE INSPECTIONS INDICATE THAT THE INSTALLED STABILIZATION AND STRUCTURAL PRACTICES ARE NOT SUFFICIENT TO MINIMIZE EROSION, RETAIN SEDIMENT, AND PREVENT DISCHARGING POLLUTANTS, THE CONTRACTOR SHALL PROVIDE ADDITIONAL MEASURES, AS APPROVED BY THE ENGINEER.

V. NON STORM WATER DISCHARGES

IF CONTAMINATED SOIL OR GROUNDWATER IS ENCOUNTERED DURING CONSTRUCTION, THE CONTRACTOR IS TO CEASE OPERATIONS IN THAT AREA. THE CONTRACTOR SHALL CONTACT THE PROJECT ENGINEER WHO WILL NOTIFY THE DISTRICT CONTAMINATION IMPACT COORDINATOR.

IT IS THE CONTRACTOR'S RESPONSIBILITY TO DESIGNATE AN AREA WITHIN THE PROJECT LIMITS FOR CONCRETE TRUCK WASHOUT ACTIVITIES. THIS AREA SHALL PROVIDE EROSION CONTROL DEVICES THAT PREVENT CONTACT BETWEEN CONCRETE WASHOUT MATERIALS AND STORM WATER AND / OR SURFACE WATERS.

IT IS THE CONTRACTOR'S RESPONSIBILITY TO DEVELOP A DEWATERING SYSTEM THAT PROVIDES PRETREATMENT OF EFFLUENT PRIOR TO DISCHARGE INTO ADJACENT SURFACE WATERS. THE CONTRACTOR'S DEWATERING METHOD MUST MEET ALL FEDERAL, STATE, AND LOCAL LAWS, RULES AND REGULATIONS CONCERNING THIS PRACTICE INCLUDING THE USE OF PERMITTED OUTFALL STRUCTURES. IT IS THE CONTRACTOR'S RESPONSIBILITY TO COORDINATE AND APPLY FOR A DEWATERING PERMIT WITH THE LOCAL WATER MANAGEMENT DISTRICT.

VI. CONTRACTOR'S SUBMITTAL

THIS SWPPP IS ONLY A PART OF THE EROSION CONTROL PLAN. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO SUBMIT A HAZARDOUS MATERIALS SPILL CONTROL PLAN TO BE INCLUDED IN THE EROSION CONTROL PLAN THE LOCATIONS OF STAGING AREAS AND STOCKPILE YARDS AND STABILIZATION PRACTICES FOR THESE SITES.

CONTRACTOR IS RESPONSIBLE FOR PRACTICING GOOD HOUSEKEEPING BMP’S INCLUDING THE STORAGE AND MAINTENANCE OF EQUIPMENT.

THE CONTRACTOR SHOULD BE AWARE THAT MODIFICATION OF THE TRAFFIC CONTROL PLAN MIGHT REQUIRE THE CONTRACTOR TO MODIFY THE SWPPP.

THE CONTRACTOR'S MODIFIED SWPPP MUST RECEIVE APPROVAL FROM THE ENVIRONMENTAL MANAGEMENT PERSONNEL PRIOR TO IMPLEMENTATION.

- THE CONTRACTOR IS RESPONSIBLE FOR SUBMITTING THE FOLLOWING ITEMS IN ORDER FOR THE NPDES PERMIT TO BE PROCESSED:
1. SIGNED CONTRACTOR CERTIFICATION FORMS (2).
 2. CONSTRUCTION PLAN SHEETS THAT ARE LISTED IN THIS SWPPP (FULL SHEETS WILL NOT BE ACCEPTED).
 3. HAZARDOUS MATERIALS SPILL CONTROL PLAN
 4. SIGNED STATEMENT THAT THE SWPPP INCLUDED IN THE CONTRACT AS PART OF THE SECTION 104 EROSION CONTROL PLAN FOR THE PROJECT WILL BE IMPLEMENTED DURING THE CONSTRUCTION OF THE PROJECT. THE CONTRACTOR MAY ELECT TO SUBMIT A REVISED SWPPP THAT IS IN COMPLIANCE WITH THE STORM WATER REGULATIONS AT 40 CFR 122.26 (B)(14) AND STATE WATER QUALITY STANDARDS.
 5. A LOCATION MAP SHOWING CONTRACTOR'S STAGING AREA, STOCKPILE AND SPOIL AREAS AND THE EROSION CONTROL FEATURES THAT WILL BE USED TO PROTECT SURFACE WATERS AND EXISTING DRAINAGE SYSTEMS.
 6. A DEWATERING PLAN TO BE APPROVED BY THE CONSTRUCTION ENGINEER IN THE EVENT DEWATERING IS REQUIRED.
 7. SITE MAP THAT SHOWS WHERE DESIGNATED WASTE COLLECTION AREA AND CONCRETE WASHOUT AREA IS LOCATED.
 8. AN EROSION CONTROL PLAN FOR ALL CONSTRUCTION ACTIVITIES THAT MAY GENERATE NON STORM WATER DISCHARGES.

THIS INFORMATION SHOULD BE SUBMITTED TO COUNTY CONSTRUCTION OFFICE **THIRTY DAYS** PRIOR TO ANY CLEARING AND GRUBBING ACTIVITIES. NO SOIL DISTURBING ACTIVITIES CAN BE CONDUCTED UNTIL THE NPDES PACKAGE HAS BEEN MAILED TO THE EPA AND FDEP FROM THE COUNTY CONSTRUCTION OFFICE.


\$FILEL \$
\$DATE\$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



STORM WATER POLLUTION PREVENTION 03

CAC Retail Center Development			SHEET 16 OF 22
COUNTY	STATE	PROJECT FINANCIAL ID	
Putnam	Florida	207346-98-27	DR-03

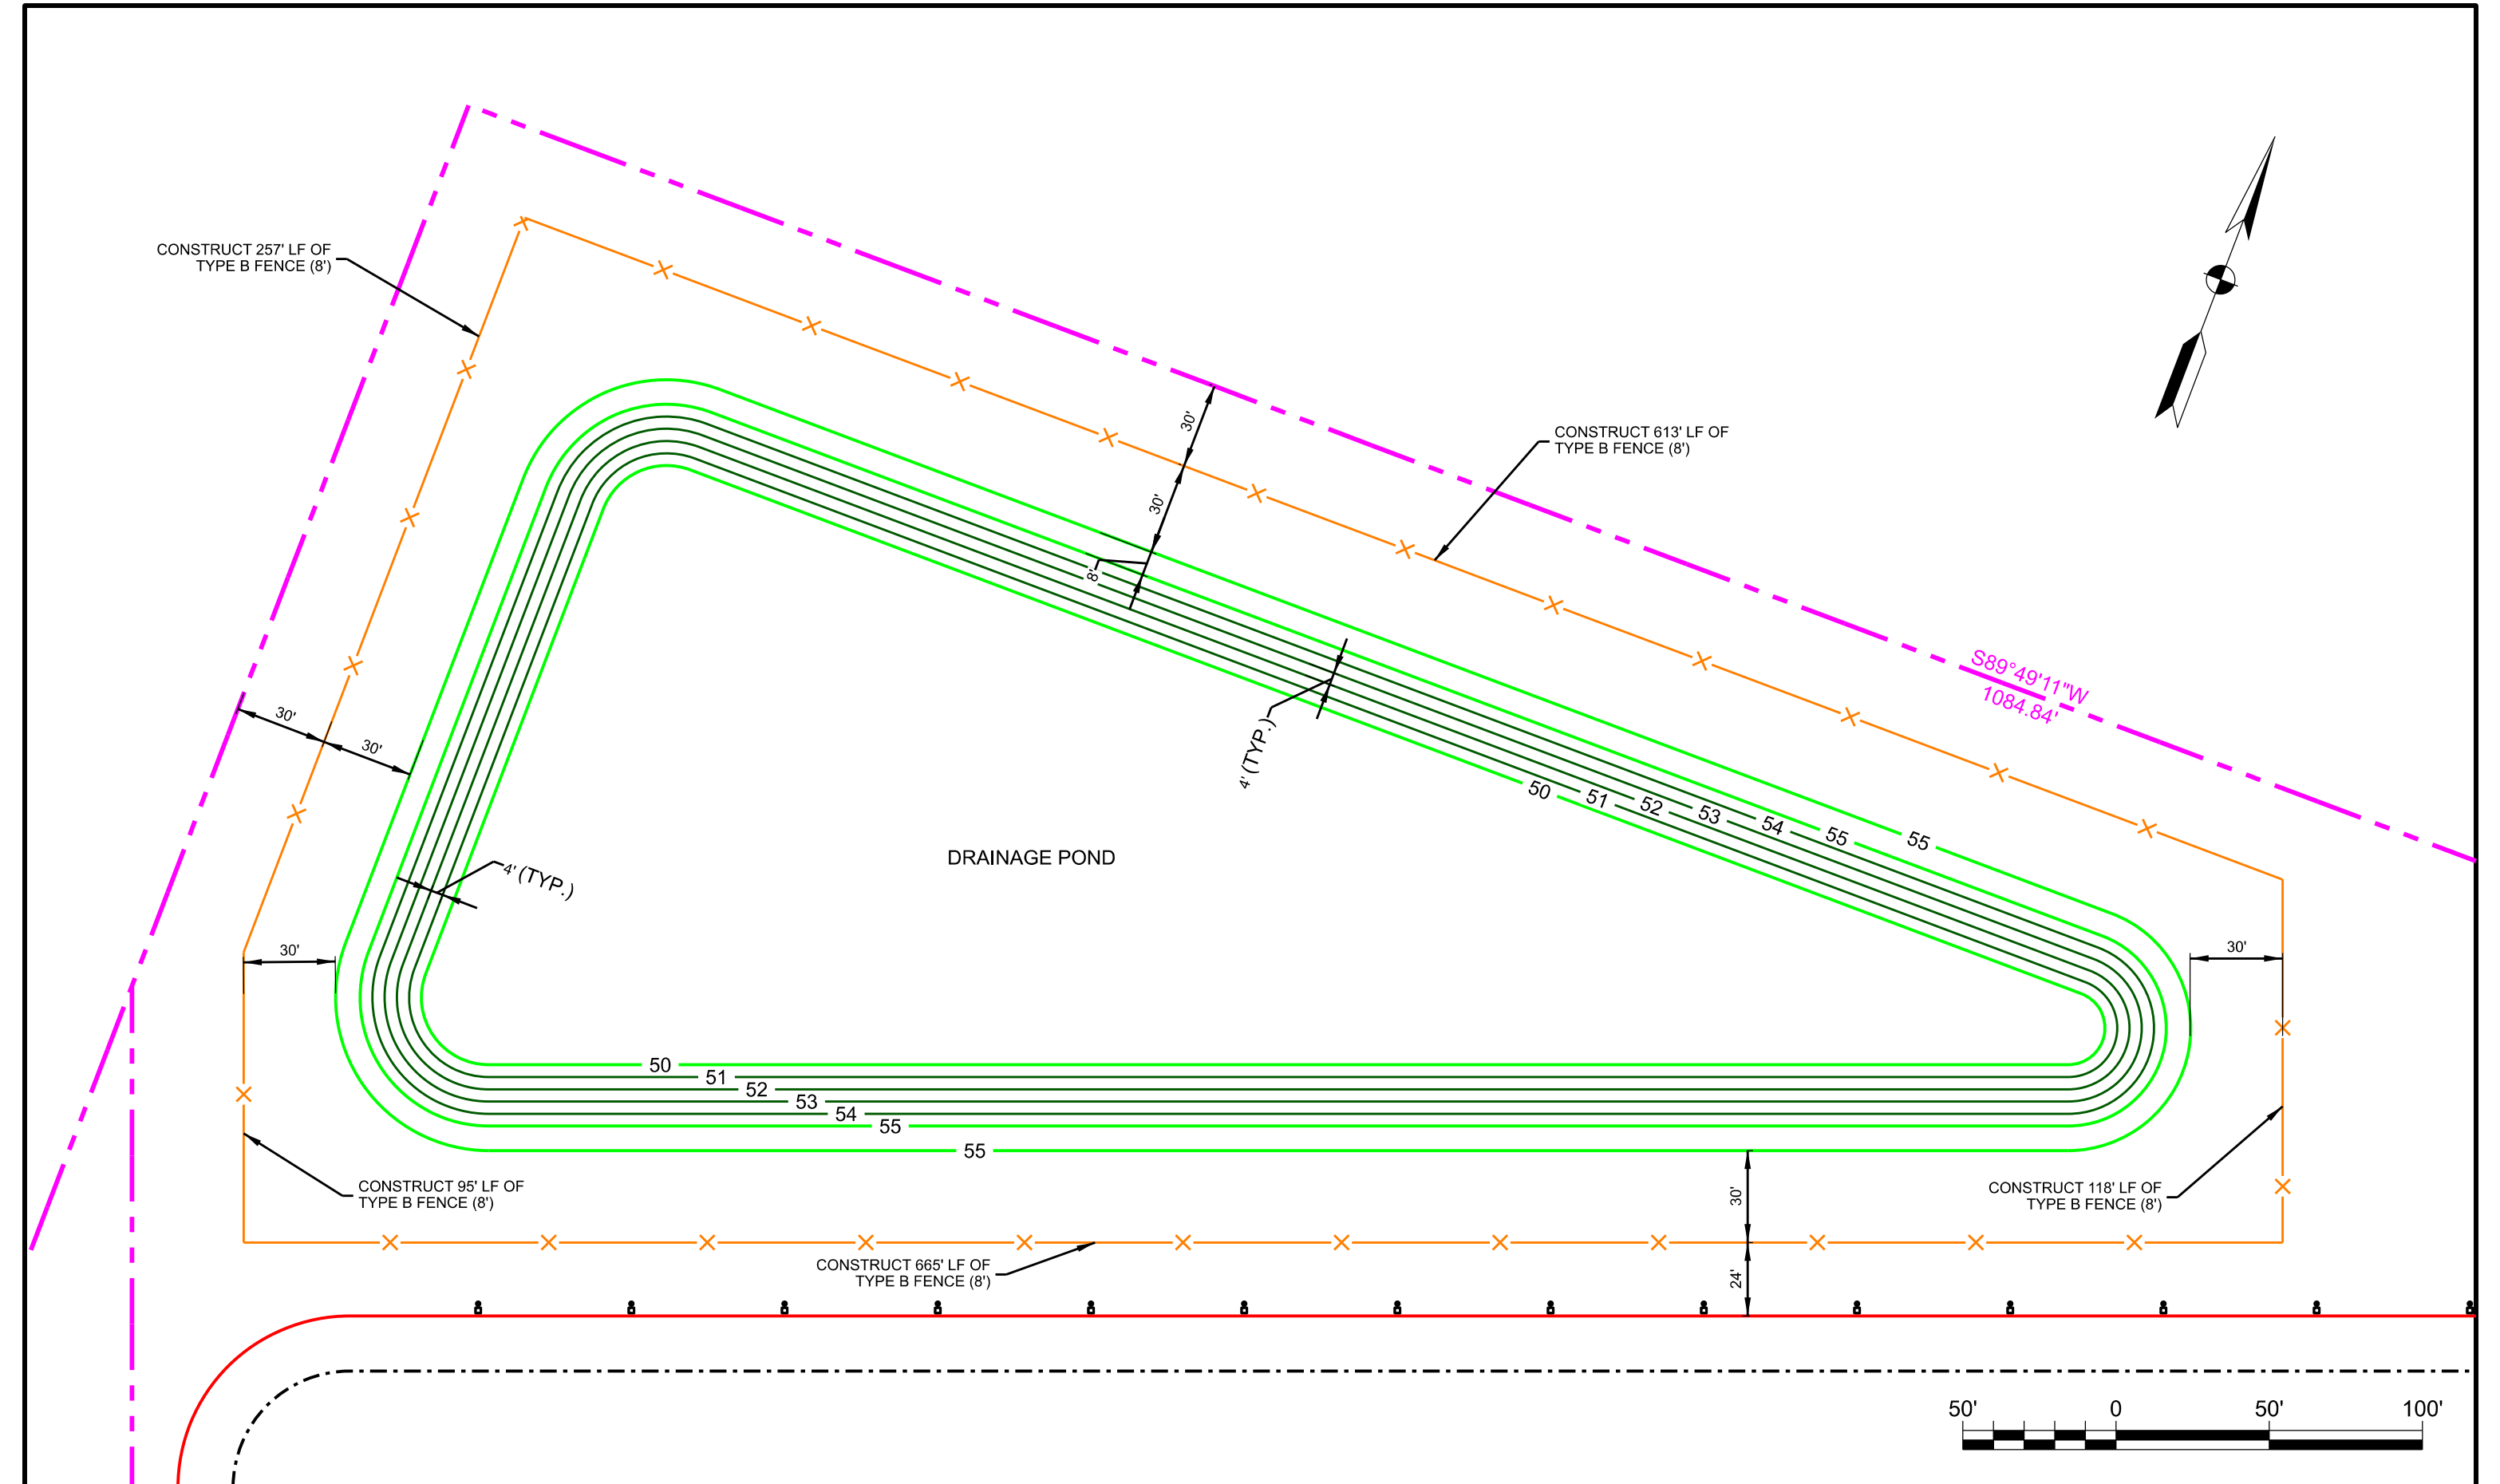


\$FILEL \$
\$DATE\$ \$
\$TIMES \$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



DRAINAGE POND PLAN

CAC Retail Development		
COUNTY	STATE	PROJECT FINANCIAL ID
Putnam	Florida	207346-98-27

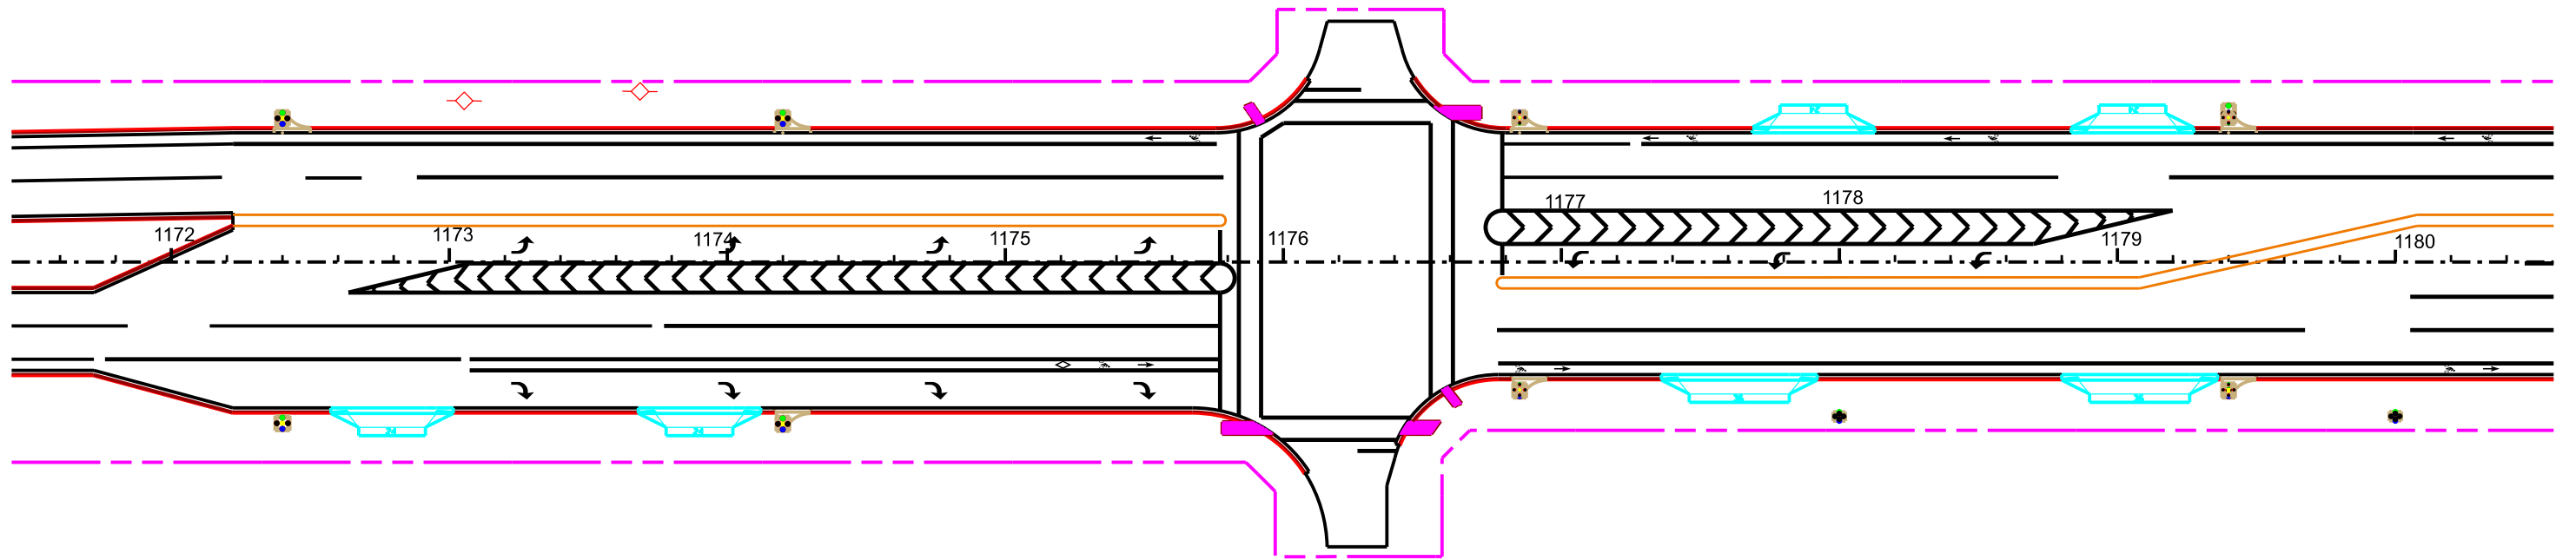

SCALE: 1" = 60'


REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION




Bentley
Institute

SIGNALIZATION PLAN


CAC Retail Development			SHEET 18 OF 22
COUNTY	STATE	PROJECT FINANCIAL ID	
Putnam	Florida	207346-98-27	SG-01

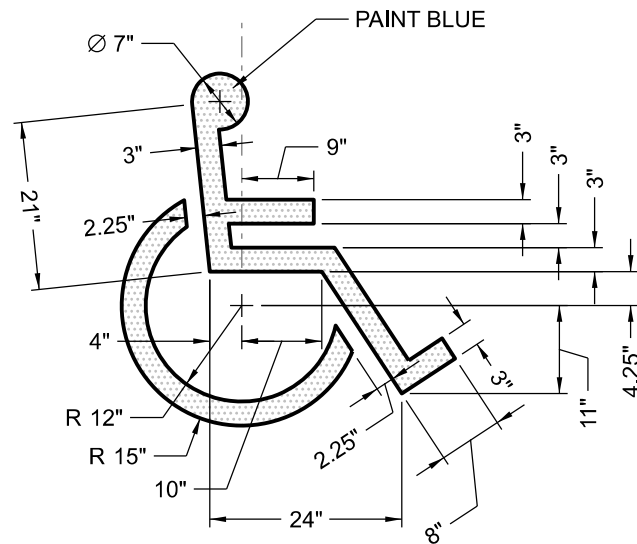


ACCESSIBILITY SYMBOL
SCALE: 1/2"=1'-0"

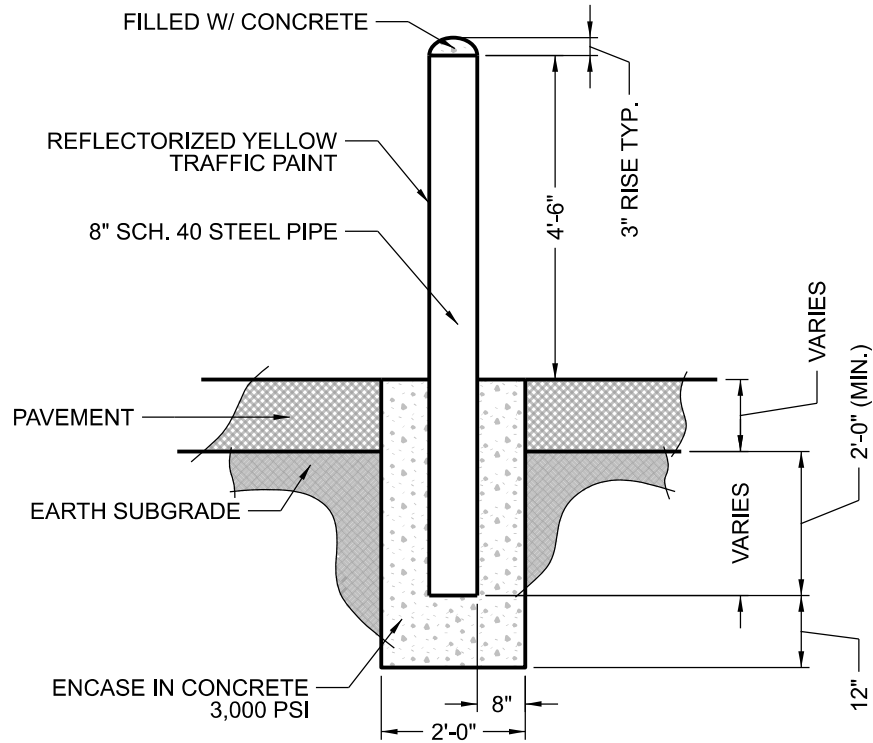


BOLLARD
SCALE: 3/8"=1'-0"

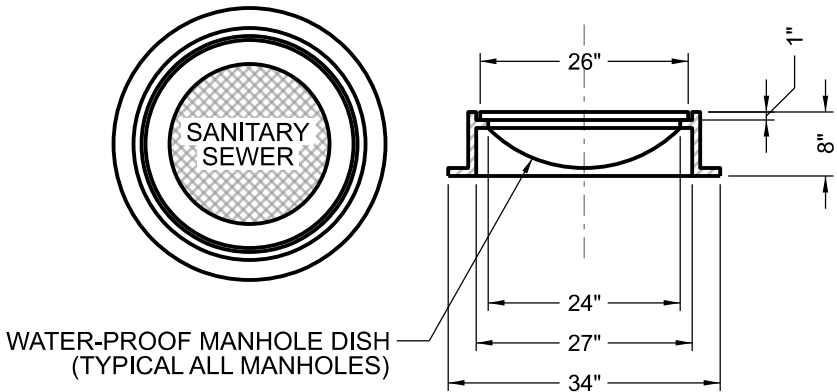


MANHOLE FRAME AND COVER
TO COMPLY WITH COUNTY STANDARDS
SCALE: 1/2"=1'-0"

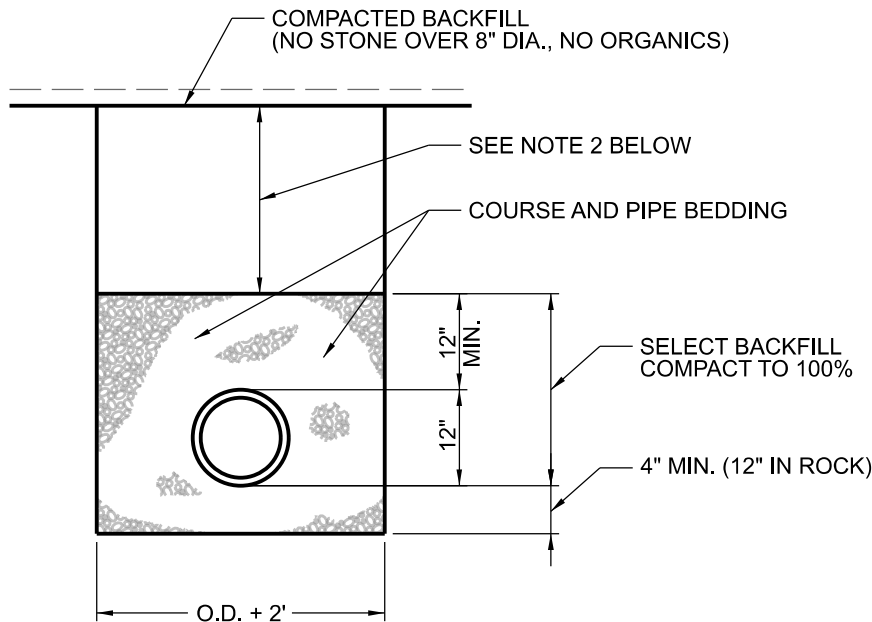

SANITARY SEWER BEDDING
TO COMPLY WITH COUNTY STANDARDS
SCALE: 1/2"=1'-0"

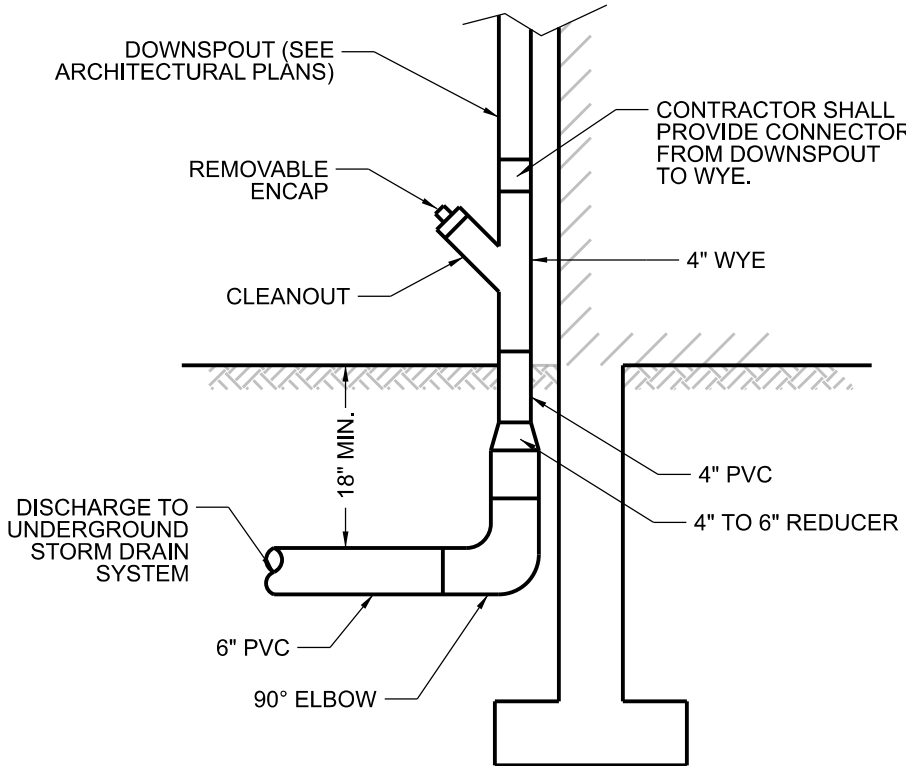

DOWNSPOUT CONNECTION
NOT TO SCALE

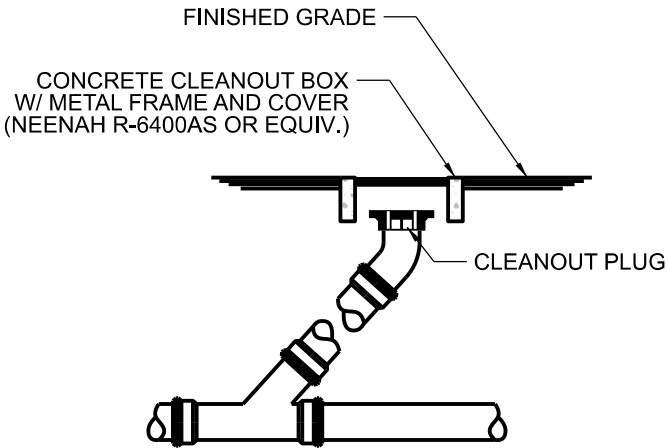


CLEANOUT IN PAVED AREAS
NOTE: G.C. IS TO INSTALL CLEANOUT AT ANY PIPING ANGLE CHANGES AND EVERY 50' IN PIPING RUNS GREATER THAN 100' IN LENGTH

SANITARY SEWER CLEANOUT
TO COMPLY WITH COUNTY STANDARDS
SCALE: 1/2"=1'-0"

FILED \$
DATE \$
TIME \$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION

	SITE DEVELOPMENT DETAILS 01			CAC Retail Center Development			SHEET 19 OF 22 DT-01
	COUNTY	STATE	PROJECT FINANCIAL ID	COUNTY	STATE	PROJECT FINANCIAL ID	
	Putnam	Florida	207346-98-27	Putnam	Florida	207346-98-27	

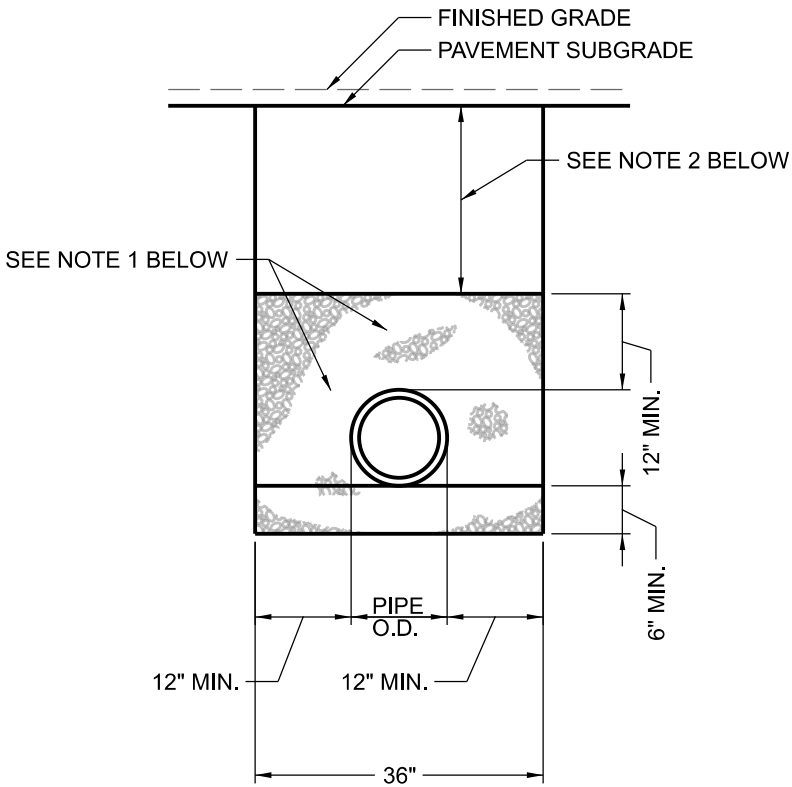


BEDDING AND BACKFILL NOTES


1. BEDDING
- A. MATERIALS FOR PIPE BEDDING AND BACKFILL (TO TOP OF PIPE) SHALL BE AASHTO NO.57 COARSE AGGREGATE.
- B. FOR SANITARY PIPE, REFER TO COUNTY STANDARDS.
2. BACKFILL
- A. BACKFILL MATERIAL FOR TRENCHES SHALL BE CLEAN ACCEPTABLE EARTH MATERIAL FREE OF OBJECTIONABLE MATERIALS AND ROCKS OVER 6" IN ANY DIMENSION. BACKFILL TO BE PLACE IN 6" LOOSE LIFTS AND TO BE COMPACTED TO 95% SSD DENSITY.
- B. NO.57 BEDDING TO EXTEND FULL WIDTH OF PIPE REMOVAL/PIPE INSTALLATION TRENCH.
- C. BEDDING IS TO EXTEND A MINIMUM OF 1' AS SHOWN. ADDITIONAL TRENCH WIDTH IS TO BE CLEAN ACCEPTABLE EARTH AS PER NOTE 1 ABOVE.
- D. FULL STONE (2 A CRSE. AGGR.) COMPACTED 100% SSD, ON ANY PUBLIC STREET, OR PUBLIC EASEMENT AREA.

TRENCH BEDDING AND BACKFILL REQUIREMENTS

SCALE: 1/2"=1'-0"

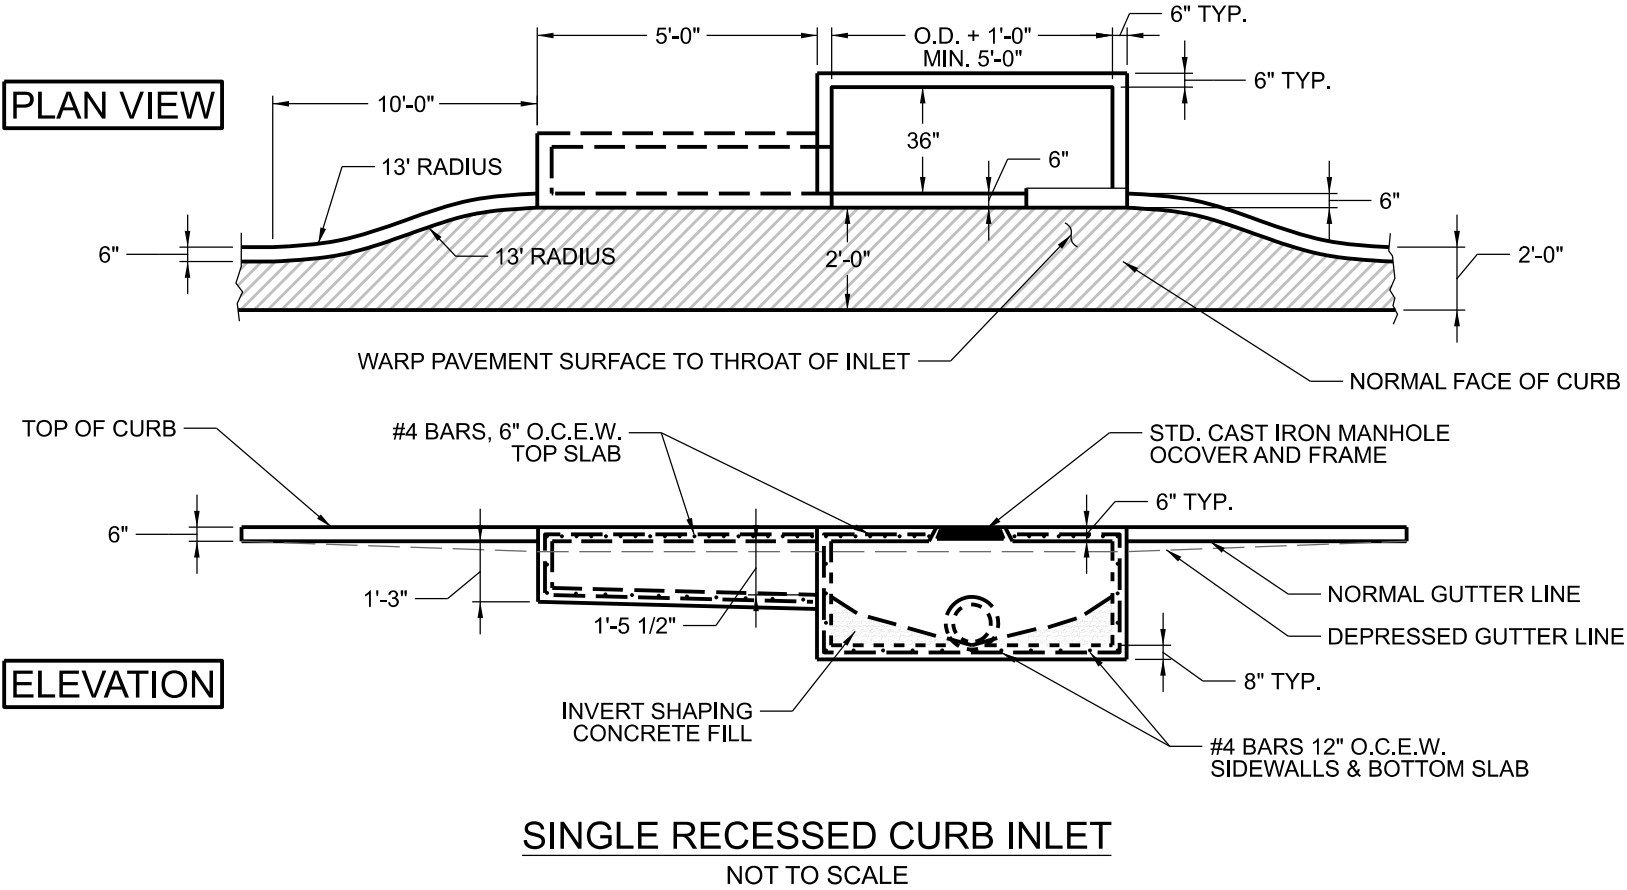

NOTE: PROVIDE CURB CONSTRUCTION JOINTS AT END OF DAILY CONCRETE POURS

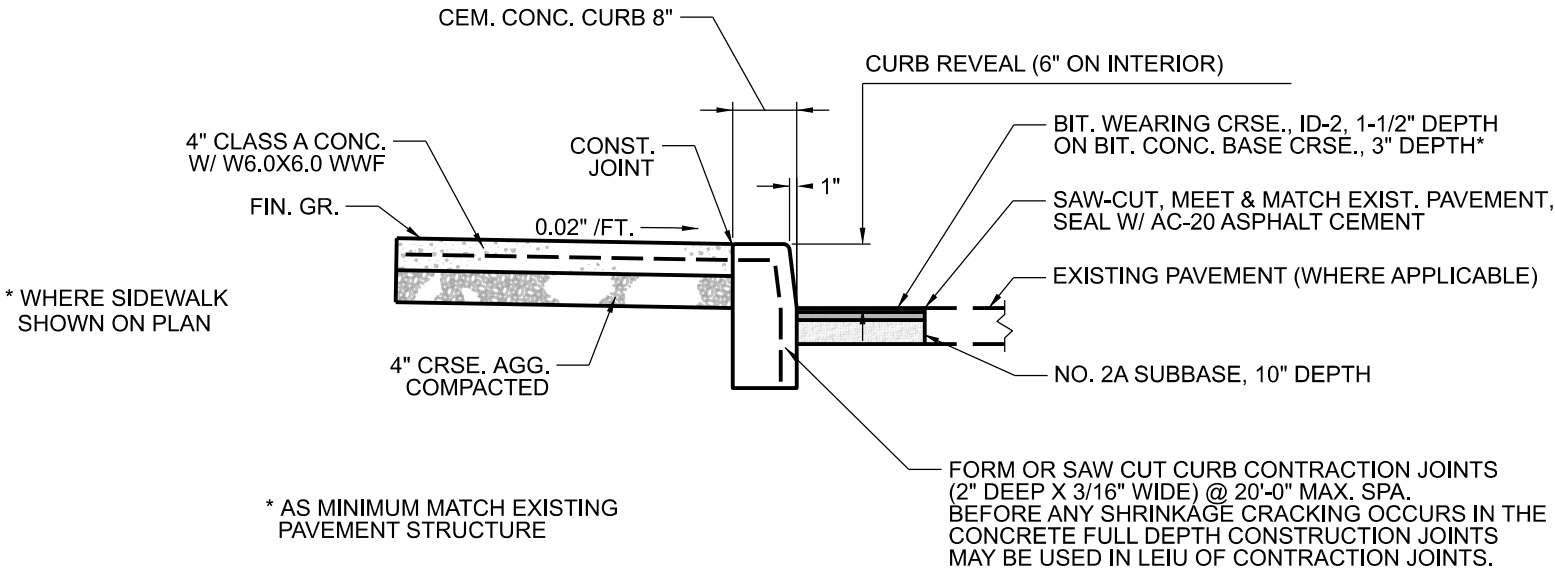

CONCRETE CURB

NOT TO SCALE

\$FILEL\$
\$SDATES\$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION




SITE DEVELOPMENT DETAILS 02

CAC Retail Center Development			SHEET 20 OF 22
COUNTY	STATE	PROJECT FINANCIAL ID	
Putnam	Florida	207346-98-27	DT-02

MINIMUM CONCRETE BLOCKING (C.Y.)*					
NO. PIPE DIA. IN.	TEES & DEAD ENDS	90° BEND	45° BEND	22 1/2° BEND	11 1/4° BEND
2-3"	1/4	1/4	1/4	1/4	1/4
4"	1/3	1/3	1/3	1/3	1/3
6"	1/3	1/3	1/3	1/3	1/3
8"	1/3	1/3	1/2	1/3	1/3

NOTE: NO CONCRETE SHALL COVER BOLTS OR GLANDS.

* CONCRETE SHALL BE 3,000 P.S.I. MIX

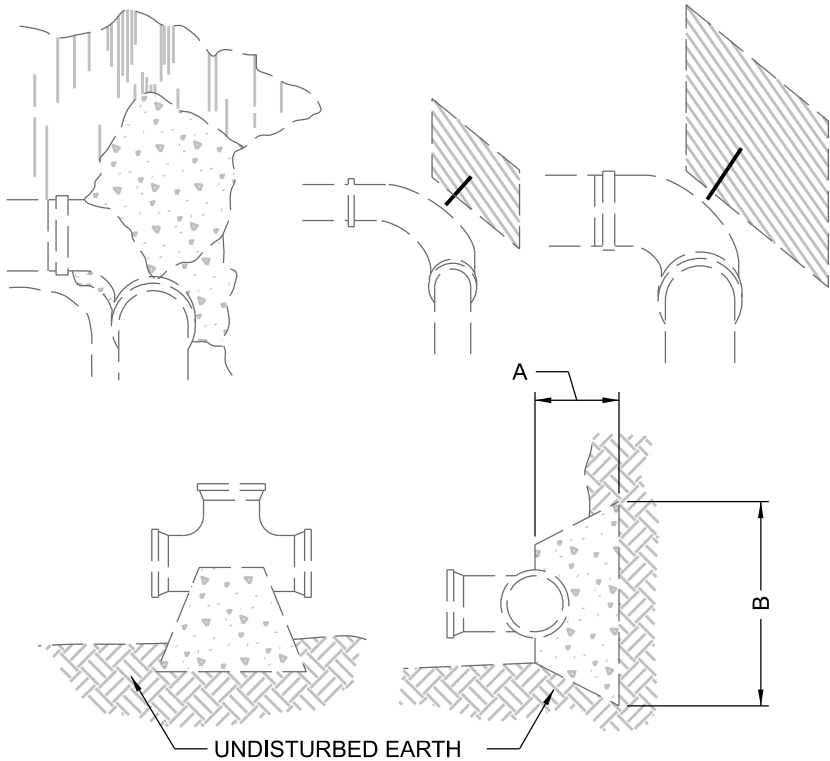


PIPE SIZE	DEGREE OF BEND	DIMENSIONS	
		A	B
5"	TEE OR PLUG	2.5'	2'
6"	90°	3'	2'
8"	45°	3'	1.5'

CONCRETE THRUST BLOCKING
NOT TO SCALE

LIGHTING FIXTURE SCHEDULE					
MARK	MANUFACTURER & CATALOG No.	LAMPS		MOUNTING	DESCRIPTION
		No.	TYPE		
OLA	LUMINARK 3D-1000-MT POLE COOPER SSS	SEE PLANS	MH-1000W	SEE DETAIL	SHOEBOX WITH VERTICAL LAMP AND ROUND TYPE 3 DISTRIBUTION
OLB	McGRAW GLS 91129AR POLE COOPER SSS	SEE PLANS	MH-1000W	SEE DETAIL	AREA LIGHT WITH AREA ROUND DISTRIBUTION

** FIXTURES AND POLES SHALL BE PAINTED PER CUSTOMERS FIELD REPRESENTATIVE

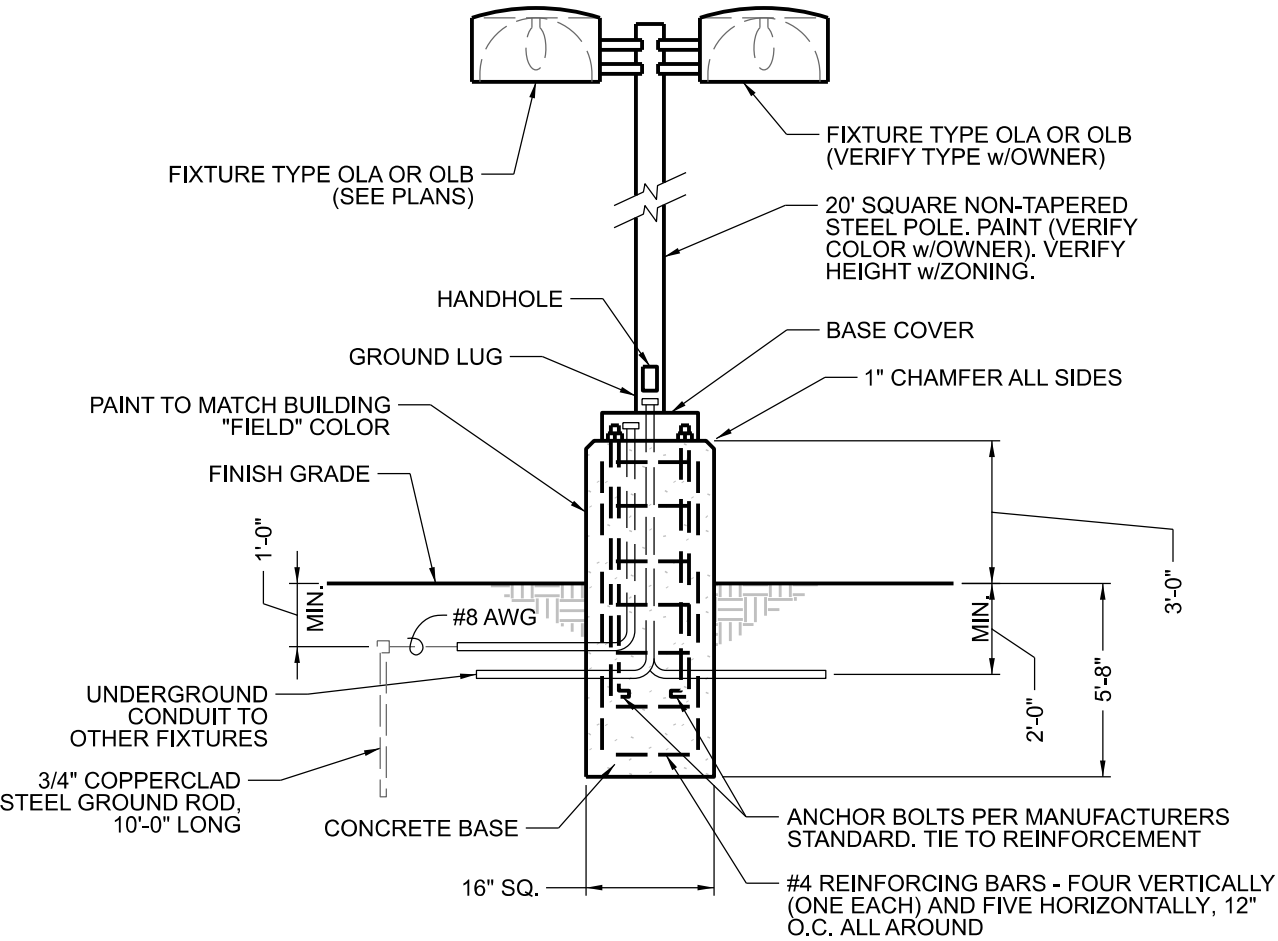

* CONCRETE BASE AND REINFORCING TO BE DESIGNED BY STRUCTURAL CONSULTANT, CIVIL ENGINEER TO COORDINATE WITH ARCHITECT.

LIGHTING STANDARD DETAIL
NOT TO SCALE


\$FILEL\$
\$SDATES\$
\$TIMES\$

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



SITE DEVELOPMENT DETAILS 03

CAC Retail Center Development			SHEET 21 OF 22
COUNTY	STATE	PROJECT FINANCIAL ID	
Putnam	Florida	207346-98-27	DT-03

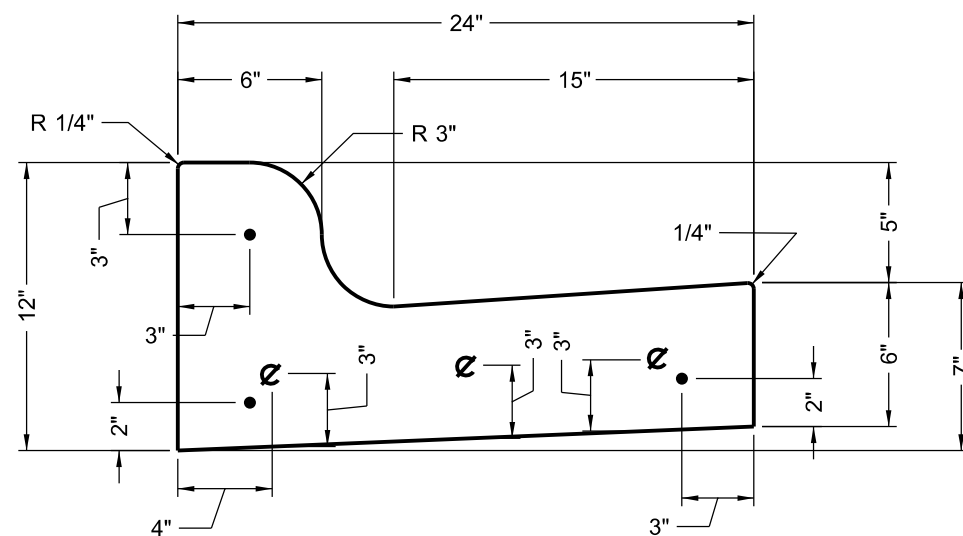


● = 4 BARS

Ø = 3/4" x 18" SMOOTH EXPANSION
DOWELS EVENLY SPACED


TYPICAL COMBINED CURB & GUTTER SECTION

SCALE: 1 1/2"=1'-0"

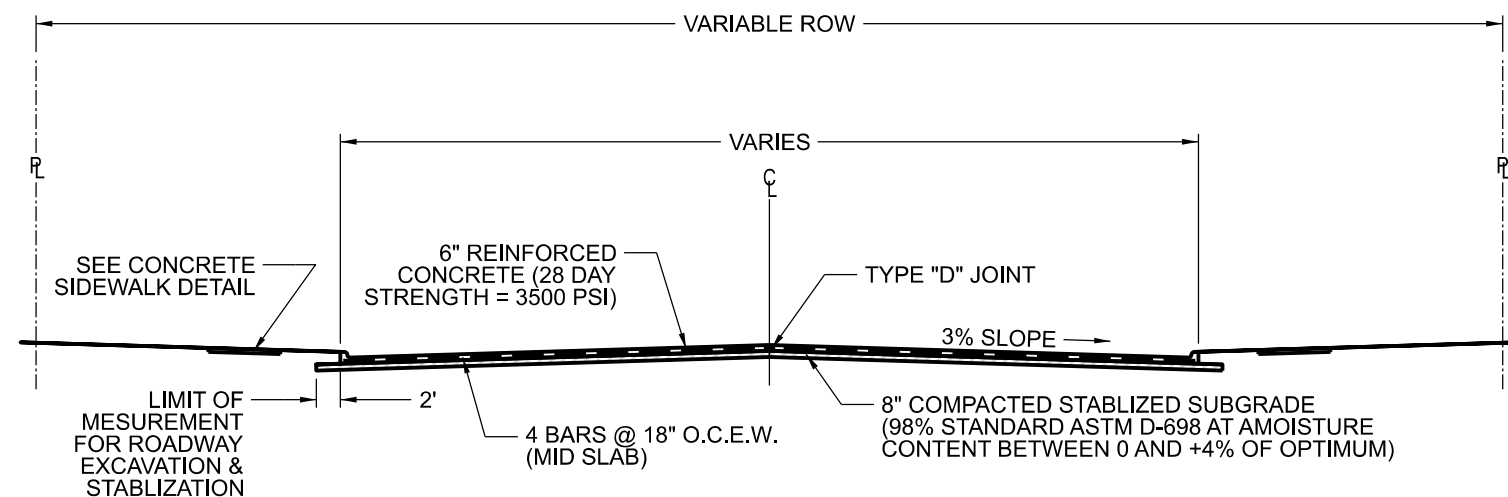

TYPICAL STREET SECTION

NOT TO SCALE

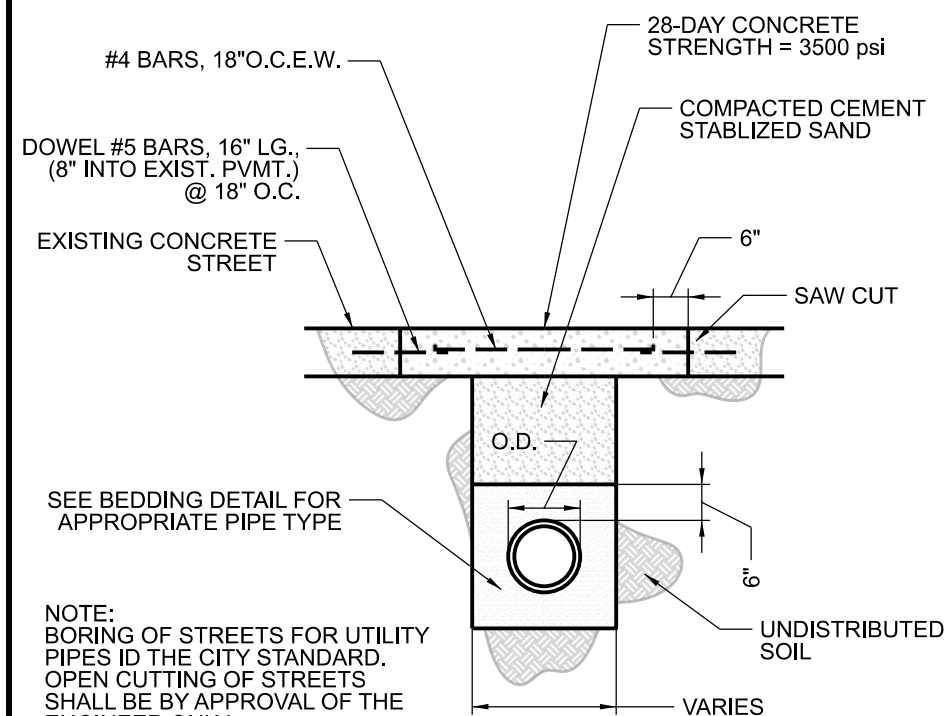

— 28-DAY CONCRETE STRENGTH = 3500 psi

— COMPACTED CEMENT
STABILIZED SAND

DOWEL #5 BARS, 16" LG.,
(8" INTO EXIST. PVMT.)
@ 18" O.C.

EXISTING CONCRETE —
STREET

— SAW CUT

O.D.

SEE BEDDING DETAIL FOR
APPROPRIATE PIPE TYPE


NOTE:
BORING OF STREETS FOR UTILITY
PIPES ID THE CITY STANDARD.
OPEN CUTTING OF STREETS
SHALL BE BY APPROVAL OF THE
ENGINEER ONLY.

ES

– UNDISTRIBUTED
SOIL

OPEN CUT CONCRETE STREET

NOT TO SCALE

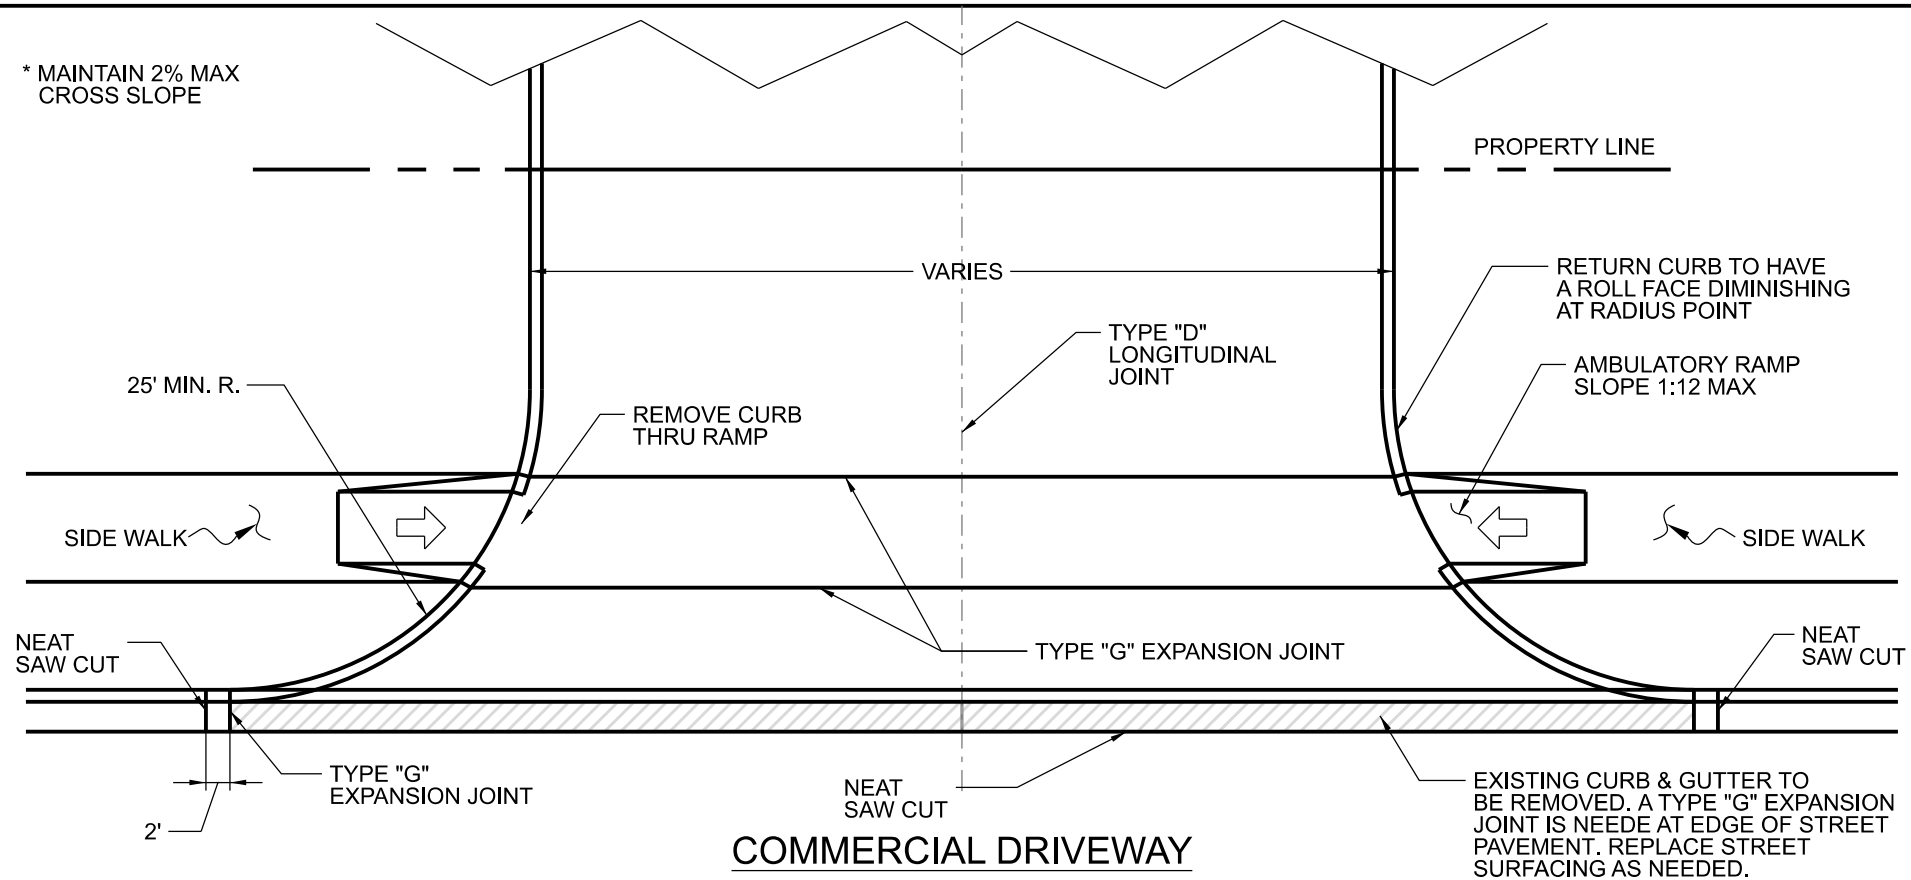

PROPERTY LINE

— VARIES

— TYPE "D"
LONGITUDINAL
JOINT

- RETURN CURB TO HAVE A ROLL FACE DIMINISHING AT RADIUS POINT

— AMBULATORY RAMP
SLOPE 1:12 MAX

SIDE WALK

— TYPE "G" EXPANSION JOINT

— NEAT
SAW CUT

— EXISTING CURB & GUTTER TO BE REMOVED. A TYPE "G" EXPANSION JOINT IS NEEDED AT EDGE OF STREET PAVEMENT. REPLACE STREET SURFACING AS NEEDED.

COMMERCIAL DRIVEWAY

NOT TO SCALE

REVISIONS			
DATE	DESCRIPTION	DATE	DESCRIPTION



SITE DEVELOPMENT DETAILS 04

CAC Retail Center Development

COUNTY

Putnam

STATE

Florida

PROJECT FINANCIAL ID

207346-98-27

SHEET 22
OF 22

DT-04